


OUTERBEND

FLEX iQ66: Static White

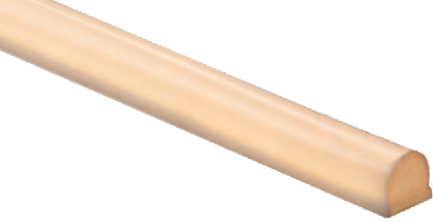


The FLEX series is the ideal LED for architectural spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The enclosure and the lens allow for a perfect monochromatic light source with no hot spots. All of Q-Tran's FLEX series lights are made with high-quality SMD LED chips, are UV- and flame-resistant and are extremely energy-efficient.

The FLEX Outerbend is available in white with a 2700K and 3000K option.


Technical Information

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	114	44 Lm/W	93	59	90	96
3000K	122	47 Lm/W	91	65	90	99

Dimensions

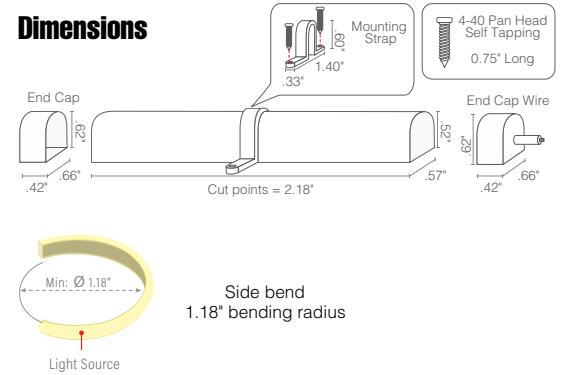

Part Number Builder

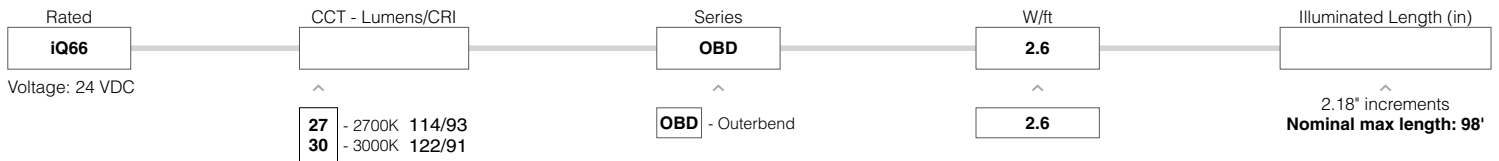

- 2 year warranty
- IP66 rated
- Ambient temperature: -40°F ~ +176°F
- UV & Flame resistant construction
- LED lifetime - 30,000 hours
- Maximum length for one run of iQ66 Outerbend 2.6. For runs greater than 49 feet, separate power feeds needed at each end. Power supply cut sheets will provide max distance/ loads per power supply.



Compatible Power Supplies

See website for additional power supply options

