




# Q-SET-mLED

The Q-SET-mLED Series Power Supply comes standard with 2 primary taps. Loads may be connected to one (1) of the taps to the full rating of the PSC. The advantage is that loads of varying distances from the PSC can be tapped to recover voltage drop.

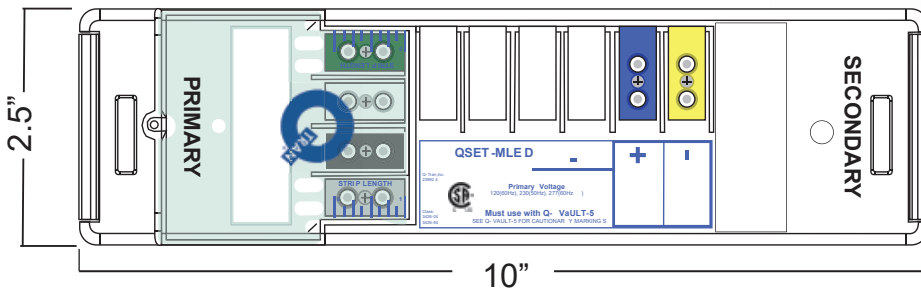

(Must be purchased with Q-VAULT-5)  
\* In One Q-VAULT can fit two Q-SET-mLED

### Q-SET Ordering & Specification Guide

1. Model Primary V. Secondary V.

**1** - **2** / **3**

#### 12V

Q-SET-MLED- 60  
Q-SET-MLED-120  
Q-SET-MLED-180  
Q-SET-MLED-240  
Q-SET-MLED-300

#### 24V

QSET-MLED-60  
QSET-MLED-100  
QSET-MLED-200  
QSET-MLED-300

### 2. Primary Voltage

120V / 220V / 240V 277V(60Hz) / 230V(50Hz)

### 3. Secondary Voltage -

8VDC or 9VDC 12VDC or 24VDC

### Ordering Guide:

QSET-MLED-240 - 120/12

CSA Certified for both the U.S. and Canada-UL listing



Secondary Breaker Amperage				<ul style="list-style-type: none"> <li>MUST BE USED WITH Q-VAULT-5</li> <li>SUITABLE FOR OUTDOOR USE</li> <li>SUITABLE FOR GROUND INSTALLATION</li> <li>SUITABLE FOR SUBMERSIBLE LUMINARIES</li> <li>Must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.</li> </ul>
Amps	Max 12V Load	Amps	Load Max 24V Load	
5	60W	4	96W	
10	120W	10	240W	
15	180W	12.5	300W	
20	240W	20	480W	
25	300W	25	600W	

- FOR SUPPLY CONNECTIONS USE WIRE RATED FOR AT LEAST 90 C
- SUITABLE FOR INGROUND INSTALLATION
- USE DIMMERS RATED FOR MAGNETIC LOW VOLTAGE LOAD
- NOT FOR INSTALLATION TO CONDUIT EXTENDING DIRECTLY TO AN UNDERWATER POOL LIGHT FORMING SHELL
- SUITABLE FOR USE WITH SUBMERSIBLE LUMINARIES
- SUITABLE FOR INDOOR & OUTDOOR USE
- WARNING : RISK OF FIRE - IF INSTALLATION INVOLVES RUNNING WIRING THROUGH A BUILDING STRUCTURE, SPECIAL WIRING METHODS ARE NEEDED. CONSULT A QUALIFIED ELECTRICIAN.

PROJECT NAME	DATE	COMPANY	TYPE	NOTE