

Q-HEX-mini

LED POWER SUPPLY 10W-60W



Q-HEX-mini is designed for outdoor, direct burial use; in conjunction with the Q-TRIX R-50. This small unit can accommodate loads up to 60W and have output voltages of either 12V/24V DC.



Part Number Builder



Technical Information

¹ Size

Size	Max Load (Watts)	Secondary Voltage (12/24VDC)	Max Prim Amps @ 120V	Max Prim Amps @ 277V
M10W-DC	10W	12VDC/24VDC	0.15 A	0.10 A
M20W-DC	20W	12VDC/24VDC	0.30 A	0.15 A
M60W-DC	60W	12VDC/24VDC	0.90 A	0.40 A




CSA Class

Input	Output (MAX)	CSA Class	
120V	12VDC	3426-04	Luminaires - Landscape Lighting Systems - Component
		3426-94	Luminaires - Landscape Lighting Systems - Component - US
120V-277V	12VDC	3426-94	Luminaires - Landscape Lighting Systems - Component - US
120V-277V	24VDC	3425-15	Luminaires - Low Voltage Lighting Systems
		3425-95	Luminaires - Low Voltage Lighting Systems - US



Q-HEX-mini

LED POWER SUPPLY 10W-60W

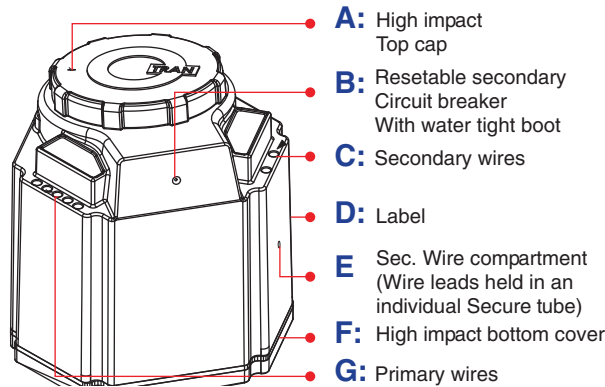

Transformer Unit

Housing

- Q-HEX-Mini must be used with Q-TRIX-R50 housing

- 10 year warranty
- Outdoor, direct burial, low voltage driver
- Power ratings of 10W-60W
- Fully dimmable with MLV dimmer
- Easy to connect and pull wire through protective tube

- All connections should be made with silicone filled wire nuts
- **Landscape Lighting**
 - : CSA C22.2 No. 250.7-07 Extra-low-voltage Landscape Lighting Systems
 - : UL 1838 Low Voltage Landscape Lighting Systems
- **Low Voltage Lighting**
 - : CSA C22.2 No. 250.0-08 Luminaires
 - : UL 2108 Low Voltage Lighting Systems

