

# Q-HEX-mini AC POWER SUPPLY 10W-75W



Q-HEX-mini is designed for outdoor, direct burial use; in conjunction with the Q-TRIX R-50. This small unit can accommodate loads up to 75W and have output voltages of either 12V/24V.



## Part Number Builder



## Technical Information

### <sup>1</sup> Size




Size	Max Load (Watts)	Secondary Voltage (12/24VAC)	Max Prim Amps @ 120V	Max Prim Amps @ 277V
M10W	10W	12V/24V	0.15 A	0.10 A
M20W	20W	12V/24V	0.30 A	0.15 A
M50W	50W	12V/24V	0.75 A	0.33 A
M75W	75W	12V/24V	1.1 A	0.50 A

## CSA Class

Input	Output (MAX)	CSA Class	
120V	12VAC	3426-04 3426-94	Luminaires - Landscape Lighting Systems - Component Luminaires - Landscape Lighting Systems - Component - US
120V-277V	12VAC	3426-94	Luminaires - Landscape Lighting Systems - Component - US
120V-277V	24VAC	3425-15 3425-95	Luminaires - Low Voltage Lighting Systems Luminaires - Low Voltage Lighting Systems - US



# Q-HEX-mini AC POWER SUPPLY 10W-75W

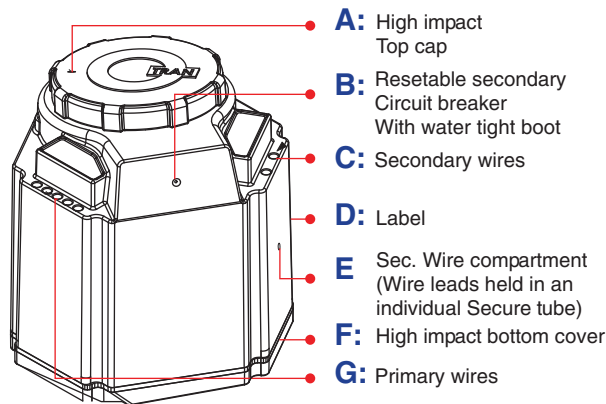

**Transformer Unit**

## Housing

- Q-HEX-Mini must be used with Q-TRIX-R50 housing

- 10 year warranty
- Outdoor, direct burial, low voltage driver
- Power ratings of 10W-75W
- Fully dimmable with MLV dimmer
- Easy to connect and pull wire through protective tube

- All connections should be made with silicone filled wire nuts
- **Landscape Lighting**
  - : CSA C22.2 No. 250.7-07 Extra-low-voltage Landscape Lighting Systems
  - : UL 1838 Low Voltage Landscape Lighting Systems
- **Low Voltage Lighting**
  - : CSA C22.2 No. 250.0-08 Luminaires
  - : UL 2108 Low Voltage Lighting Systems

