


# QOM-DRIVE-PS

LED POWER SUPPLY 60W-200W




The Q-Tran QOM-Drive-PS is a constant voltage eledoLED LINEARdrive LED Driver which can be wired for DMX or DALI. Available in 12VDC from 60-120W or 24VDC from 100-200VDC. Pool & spa option available. All of the QO Line of power supplies are outdoor-rated and surface mountable.

Non Pool & Spa model shown

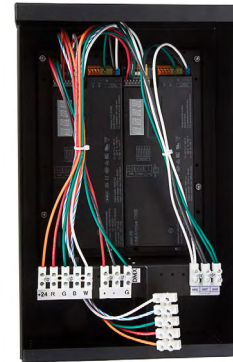

## Part Number Builder

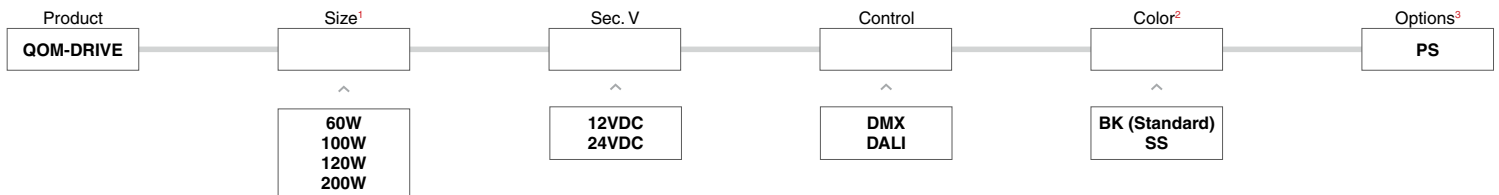

## Technical Information

### <sup>1</sup> Size

Size	Max Load (Watts)	Secondary Voltage (12/24VDC)	Max Prim Amps @ 120V	Max Prim Amps @ 277V
60W	1x60W	12VDC	1.05A	0.45A
120W	2x60W	12VDC	2.10A	0.90A
100W	1x100W	24VDC	1.05A	0.45A
200W	2x100W	24VDC	2.10A	0.90A

### <sup>2</sup> Color

**BK** Black Powder Coat Finish (Standard)  
**SS** 316 Marine Grade Stainless Steel

### <sup>3</sup> Options

**PS** Pool & Spa

## Voltage Drop Chart

VDC	Watts (W)	10 AWG (5.6mm <sup>2</sup> )	12 AWG (3.3mm <sup>2</sup> )	14 AWG (3.0mm <sup>2</sup> )	16 AWG (1.3mm <sup>2</sup> )	18 AWG (0.78mm <sup>2</sup> )	20 AWG (0.50mm <sup>2</sup> )	22 AWG (0.33mm <sup>2</sup> )	24 AWG (0.22mm <sup>2</sup> )	26 AWG (0.13mm <sup>2</sup> )
		12	12	315'	198'	125'	78'	49'	31'	19'
	25	115'	72'	45'	28'	18'	11'	7'	4'	4'
	60	7'	4'	3'						
24	17	897'	564'	355'	223'	140'	88'	55'	35'	22'
	25	567'	356'	224'	141'	88'	56'	35'	22'	14'
	40	309'	194'	122'	77'	48'	30'	30'	12'	7'
	80	130'	82'	51'	32'	20'	13'	8'	5'	3'
	100	84'	53'	33'	21'	13'	8'	5'	3'	



\*Distances are based on a 5% Voltage drop max.

• This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved



# QOM-DRIVE-PS

LED POWER SUPPLY 60W–200W

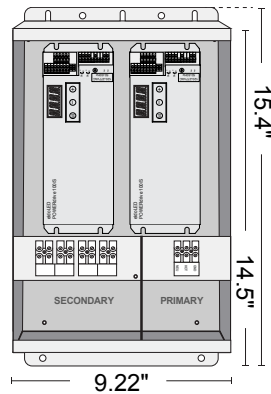

## Housing

- 18 gauge welded steel enclosure: 15.4"L x 9.22"W x 4.90"D
- Door: 14.5"L x 9.27"W
- Knockouts: 9
- Built-in support bracket incorporated to secure housing for surface mounting

## Performance

- Power Supply
  - : Rated for surface mount or outdoor use
  - : Fully rated to operate low voltage load at listed wattage (No derating required)
  - : Voltage regulation to 5% or less of rated output voltage
  - : Universal input range of 120-277 Vrms
- Low Voltage Lighting Systems
  - : CSA Class 3425-15 and Class 3425-95
- LED Landscape Lighting System Components
  - : CSA Class 3426-04 and Class 3426-94
- Hydromassage (Pool & Spa)
  - : CSA Class 3425-46 and Class 3425-96
  - : Short circuit protection (SCP)
  - : Overload protection (OLP)
  - : Live tested by the manufacture to ensure proper operation
  - : Manufacturer offers a minimum of 5 years warranty
- Terminal blocks is made of tin plated copper with a voltage rating of 300V and a current rating of 40A

- DMX or DALI controllable
- Surface mount capable
- Suitable for dry, damp and wet locations
- Suitable for indoor, outdoor, or pool & spa use
- 4x 12/24V controllable outputs per driver
- Standby power: < 0.5W
- Built-in surge protection: 3kV (L to N), 4kV (L/N to GND)
- Flicker free operation
- Efficiency: 90% at full load, ≥ 87% above 50W output
- Class 2 output
- Power factor: > 0.94
- THD @ full load : < 10%
- 3 year warranty

## • CSA #239924

### Low Voltage Lighting Systems

- : CSA Class 3425-15 and Class 3425-95
- : CSA Standard C22.2 No. 250.0-08 - Luminaires
- : ANSI/ UL Standard 2108 - Low Voltage Lighting System
- : ANSI/ UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products
- : CSA Std C22.2 No 250.13-14 - Light Emitting Diode (LED) Equipment for Lighting Applications

### Landscape Lighting Systems

- : CSA Class 3402-15 and Class 3402-95
- : CSA Standard C22.2 No. 250.7-07 - Extra-Low-Voltage Landscape Lighting Systems
- : ANSI/ UL Standard 1838 - Low Voltage Landscape Lighting Systems
- : ANSI/ UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products
- : CSA Std C22.2 No 250.13-14 - Light Emitting Diode (LED) Equipment for Lighting Applications

### Hydromassage (Pool and Spa)

- : CSA Class 3425-46 and class 3425-96
- : UL Standard 379 - Power Unit for Fountain, Swimming Pool and Spa Luminaires
- : CSA STD C22.2 NO.89-15-Swimming Pool Luminaire, Submersible Luminaires and Accessories



# QOM-DRIVE-PS

LED POWER SUPPLY 60W–200W




## DMX in/LedSync out

- Use these connectors when the driver is used in a DMX network. For DMX in, connect the network cable's DMX+, DMX- and DMX shielding wire (the orange/white, orange and brown wire in a CAT5 cable) to the DMX in+, DMX in- and DMX in shield connector respectively. For LedSync out, connect the network cable's DMX+, DMX- and DMX shielding wire to the LedSync out+, LedSync out- and LedSync shield connector respectively.

## DALI

- Use these connectors to connect the driver to a DALI network. Always combine a DA+ and DA- connector for either data input or data output. A separate DALI power supply is required to power the DALI bus.


## Wiring Diagram

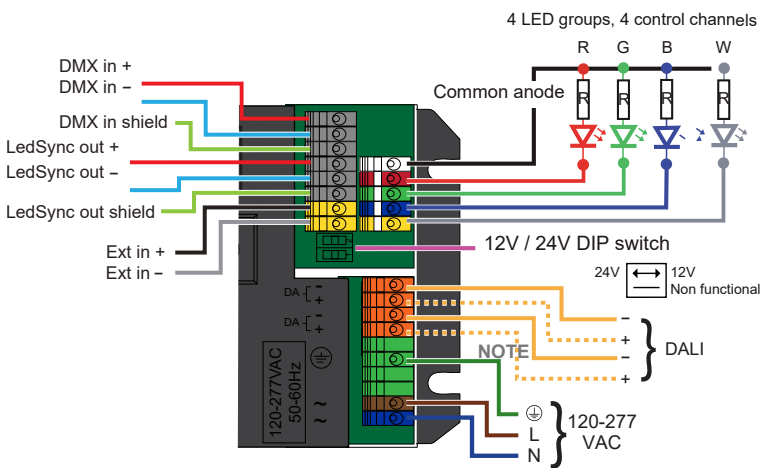

**LED wire length:** Maximum wire length from LED driver to LED engine at full load:

AWG value	20	18	16
Distance (ft)	46	72	118

**NOTE:** Longer wire lengths increase EMI susceptibility.

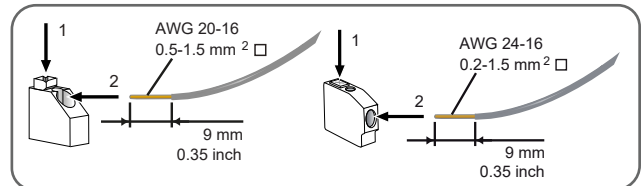

### Pay attention when connecting the LED groups:

- polarity reversal results in no light output and often damages the LEDs
- combining + and - of different groups damages the driver

## INPUT

- Voltage: 120 - 277 VAC, 50/60Hz
- Current, max per driver:
  - 1.05A at 120V/60Hz
  - 0.5A at 230V/50Hz
  - 0.45A at 277V/60Hz

## OUTPUT

- Power per driver: 100W max
- Voltage: 12V/24V output
- Current
  - RGBW @ 12V: 1.25A per output
  - RGBW @ 24V: 1A per output
- Output
  - RGB @ 12V: 1.66A per output
  - RGB @ 24V: 1.33A per output
- Current max: 5A common anode

## ENVIRONMENTAL

- Ta operating range : -40°F ~ +122°F
- Tc max : 185°F
- Lifetime : 50K hours at 122°F
- MTBF : 480,000 hours

## COMPLIANCE / SAFETY

- Class 2 output.
- Class A sound rating
- FCC: Title 47CFR Part 15 Class B
- The wiring inside electrical enclosures shall comply with the 600V/105 °C or higher.
- CSA certified
  - : UL-2108
  - : UL-1838
  - : UL-8750
  - : CSA C22.2 No 250.7-07
  - : CSA C22.2 No 250.0-08
  - : CSA C22.2 No 250.13-14
  - : CSA C22.2 No 89-15

**NOTE:** All measurements have been carried out at maximum load in free air without heat sink.




# QOM-DRIVE-PS

LED POWER SUPPLY 60W–200W



### Lifetime data

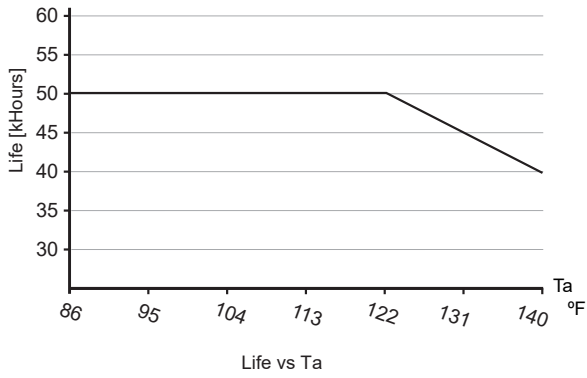

### Power factor data

