


QOM-PH LED POWER SUPPLY 80W-160W



QOM-PH is a constant voltage electronic power supply compatible with a variety of third-party forward or reverse phase dimming modules. Available in 24VDC from 80-160W. It is indoor and outdoor rated with an additional option to be used in pool & spa applications. This surface mountable power supply comes standard in black and is also available in stainless steel. It is UL and Class II Listed.



Part Number Builder

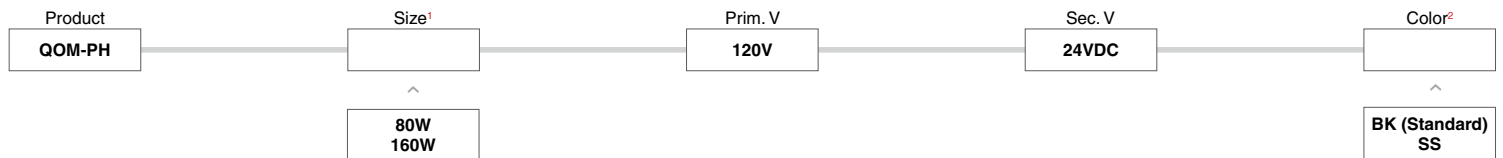

Technical Information

¹ Size

Size	Max Load (Watts)	Secondary Voltage (12/24VDC)
80W	1x80W	24VDC
160W	2x80W	24VDC

² Color

- BK** Black Powder Coat Finish (Standard)
- SS** 316 Marine Grade Stainless Steel

Voltage Drop Chart


VDC	Watts (W)	10 AWG (5.6mm ²)	12 AWG (3.3mm ²)	14 AWG (3.0mm ²)	16 AWG (1.3mm ²)	18 AWG (0.78mm ²)	20 AWG (0.50mm ²)	22 AWG (0.33mm ²)	24 AWG (0.22mm ²)	26 AWG (0.13mm ²)
24	17	897'	564'	355'	223'	140'	88'	55'	35'	22'
	25	567'	356'	224'	141'	88'	56'	35'	22'	14'
	40	309'	194'	122'	77'	48'	30'	30'	12'	7'
	80	130'	82'	51'	32'	20'	13'	8'	5'	3'
	100	84'	53'	33'	21'	13'	8'	5'	3'	3'

*Distances are based on a 5% Voltage drop max.

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved



QOM-PH LED POWER SUPPLY 80W-160W

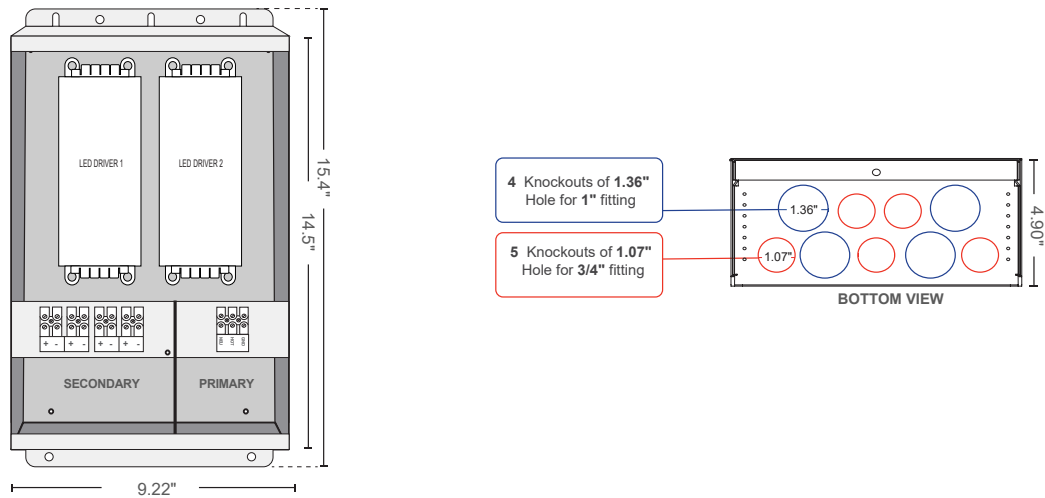

Housing

- 18 gauge welded steel enclosure: 15.4"L x 9.22"W x 4.90"D
- Door: 14.5"L x 9.27"W
- Knockouts: 9
- Built-in support bracket incorporated to secure housing for surface mounting

- Suitable for dry, damp and wet locations
- Suitable for indoor or outdoor use
- Wide dimmer compatibility-supports most phase type dimmers in the market
- Forward phase and reverse phase dimmer control or on/off
- Integral wiring compartments for reduced installation costs
- Active Power Factor Correction, PF>0.9
- Energy Star Compliant
- Built-in protection:
 - SCP (Short Circuit Protection)
 - OTP (Over Temperature Protection)
 - OVP (Over Voltage Protection)
 - OCP (Over Current Protection)

- Completely potted design, no venting required
- Operating temperature range: -40 to +140 °F
- Constant Voltage
- 5 year warranty
- CSA #239924

Low Voltage Lighting Systems

: ANSI/ UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products

Landscape Lighting Systems

: ANSI/ UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products



Specifications

Input	Min	Nom	Max
Voltage (RMS)	100	120	130
Frequency (Hz)	47	50/60	63
Power Factor	0.9	---	---

Output	Min	Nom	Max
Line Regulation (%)	-10	---	10
Load Regulation (%)	---	---	5

Environmental	Min	Nom	Max
Storage Temperature (°C)	-40	---	85
Operating Temperature	-40	---	60
Relative Humidity (%)	5	---	95
MTBF (Hours @ 25°C (77°F), Full Load)	80,000	---	---

Expected Lifetime	Temp
50,000 hours	65°C
30,000 hours	75°C

Protections


- Short Circuit Protection (SCP)
- Over Voltage Protection (OVP)
- Over Current Protection (OCP)
- Over Temperature Protection (OTP)
- Hiccup-Mode, Auto-Recovery upon removal of short
- 105% of Voltage (typ) Min

Compliance/Safety


- EMI/RFI : CISPR-22 Class B
: FCC part 15 Class B
: EN55015, EMC
- CSA certified
: UL-2108
: UL-1838
: UL-8750
: UL-379
: CSA C22.2 No 250.7-07
: CSA C22.2 No 250.0-08
: CSA C22.2 No 250.13-14
: CSA C22.2 No. 89-15
: CE(IEC/EN61347-1, IEC/EN61347-2-13)




DERATING CURVE

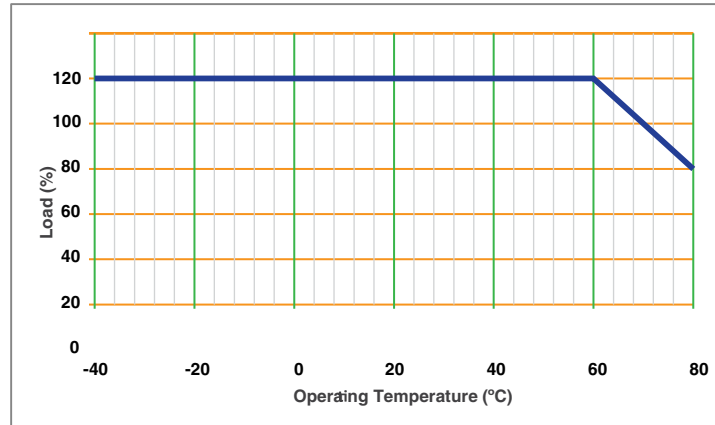

OUTPUT VOLTAGE vs. LOAD

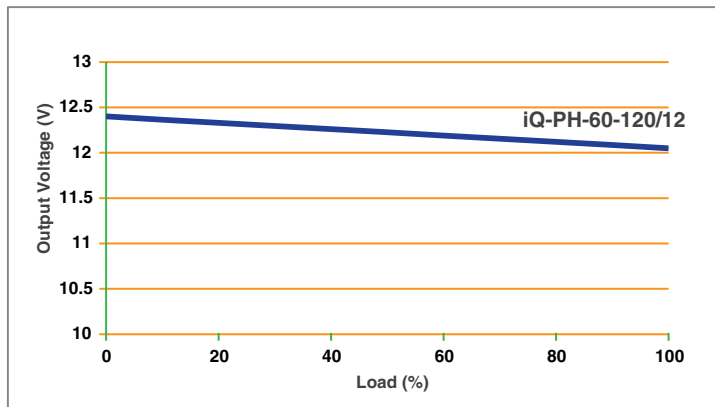

OUTPUT VOLTAGE vs. LOAD

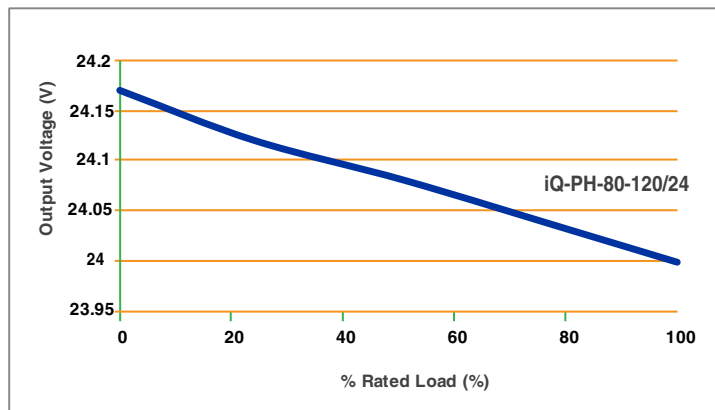

QOM-PH LED POWER SUPPLY 80W–160W



Supported Dimming List 90~120V AC ELV (Reverse phase) & Triac (Forward phase) Dimmer

Brand	Model	Dimmer Rating Power (max)	LED Flicker Free Test*
Lutron	DVCL-153PL (C/L)	600W	Pass
Lutron	TGCL-153P (C/L)	600W	Pass
Lutron	AB-600M-WH (Abella)	600W	Pass (##)
Lutron	D-600RH-DK (Rotary)	600W	Pass
Lutron	D-600R-WH (Rotary)	600W	Pass
Lutron	D-603PG-WH (Rotary)	600W	Pass
Lutron	GL-603PH-DK (GLYDER-3-way)	600W	Pass
Lutron	GL-600-WH (Glyder)	600W	Pass (##)
Lutron	MA-600GH-WH (Ecodim Digital with indicator leds)	500W	Pass (##)
Lutron	MIR-600THW-WH (RC Digital Fade Dimmer)	600W	Pass
Lutron	MS-VP600GHW-WH (Vacancy Sensor w/eco-dim Dimmer)	600W	Pass (##)
Lutron	S-600PH-WH (SKYLARK))	600W	Pass
Lutron	SELV-300PH-WH (SKYLARK-Single Pole)	300W	Pass
Lutron	TG-600PH-WH (Toggler)	600W	Pass
Lutron	TG-603PFH-WH (Toggler-eco-dim)	600W	Pass
Lutron	TT-300NLH-BL	600W	Pass
Cooper Wiring Devices	RI061-A (Rotary Dimmer w/ Non-Present)	600W	Pass
Cooper Wiring Devices	6001	600W	Pass
Cooper Wiring Devices	SLC03P (C/L)	600W	Pass
Cooper Wiring Devices	SI06P (non C/L)	600W	Pass
GE	DI61-271	600W	Pass
GE	DIB61-71	600W	Pass
GE	DIT61-71	600W	Pass
GE	DIT61-S71	600W	Pass
Legrand	V8051	600W	Pass

NOTE: ● ## -5-100% dimming range.

- Flicker tests were carried out to ensure full range, flicker-freedimming from min to full load.
- This is a representative list of dimmers only. Q-Tran makes nospecific recommendation on product selection and there are no warranties of performance or compatibilityimplied. Refer to dimmer manufacturers for further information on LED compatibility. Lutron and their productbrand names are registered brand names are registered trademarks.

