

The QJB is available in either 10 watts or 20 watts; 120V or 277V input; 12V or 24V output. The QJB is an actual junction box which provides a solid solution for smaller loads supporting LED applications.




### Part Number Builder

Product <b>QJB</b>	Size <sup>1</sup>	Prim. V	Sec. V
	^	^	^
	10DC 20DC	120 (60Hz) 277 (60Hz)	12VDC 24VDC

### Technical Information

#### <sup>1</sup>Size

Size	Watts	Secondary Voltage	Max Prim Amps @ 120V	Max Prim Amps @ 277V
10DC	10W	12VDC	0.096 A	0.042 A
20DC	20W	12VDC	0.192 A	0.083 A
10DC	10W	24VDC	0.096 A	0.042 A
20DC	20W	24VDC	0.192 A	0.083 A

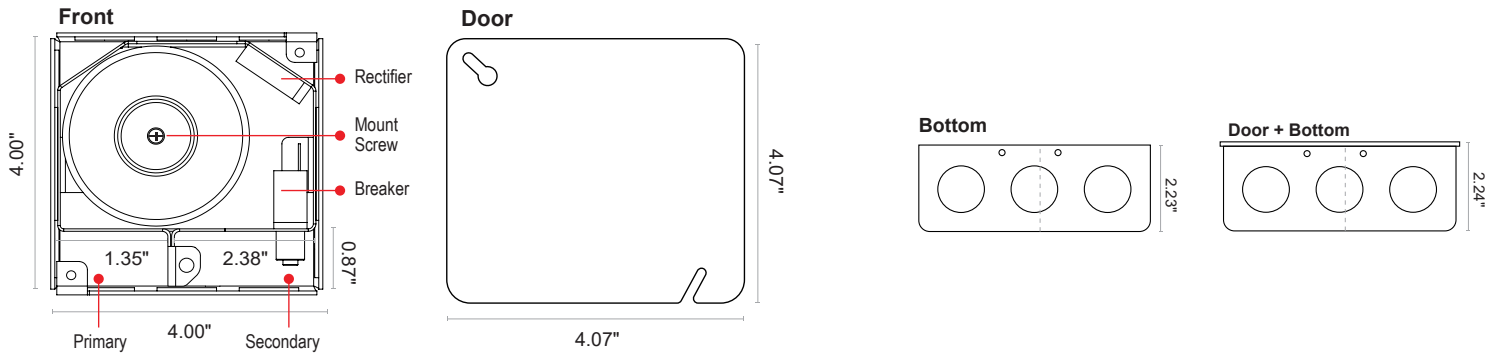

### Housing

- 20 - gauge steel enclosure
- Junction Box: 4.00"W x 4.00"H x 2.20"D
- Door: 4.07"W x 4.07"H
- Color: white powder coating
- Knockouts: 2

### Primary Circuit Protection

- Primary Autotest Thermal Protector

NOTE: Thermal protector will temporarily disconnect the primary if the transformer overheats due to an overload or saturation from a faulty dimmer

### Secondary Circuit Protection

- Magnetic Circuit Breaker: 1
- Amps: 4A

NOTE: Breakers are sized to the feed load per N.E.C. Article 411

### Included Items

- Barrier Plate

### Toroidal Transformer

- Primary Taps: 1
- Output Voltages: 12V or 24V

NOTE: 20W Supplies have one tap and 40W supplies have 3 taps

- For indoor use only
- Suitable for damp locations
- Wall or recess mount capable
- Type IC recessed, inherently protected
- Dimmer, if used, must be magnetic low voltage dimmer
- Class 2 output
- Dimmers must have a neutral

- Suitable for Class 2 wiring
- For supply connections use wires rated for at least 75°C
- CSA #239924

#### Low Voltage Lighting Systems

- : UL 1598 - Luminaires
- : UL Standard 2108 - Low Voltage Lighting System
- : UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products
- : CSA C22.2 No 250.13-14 - Light Emitting Diode (LED) Equipment for Lighting Applications

### Wiring Diagram

