






Q-HEX-Mini AC

Q-HEX Mini is designed for outdoor, direct burial use; in conjunction with the Q-TRIX R-50. This small unit can accommodate loads up to 75W and have output voltages of either 12V/24V AC

FEATURES

- Outdoor, Direct Burial, Low Voltage Driver
- Power ratings of 10W-75W
- Fully Dimmable with MLV Dimmer
- Easy to connect and pull wire through protective tube
- All connections should be made with silicone filled wire nuts
- Standards
 - Landscape Lighting
 - : CSA C22.2 No. 250.7-07 Extra-low-voltage Landscape Lighting Systems
 - : UL 1838 Low Voltage Landscape Lighting Systems
 - Low Voltage Lighting
 - : CSA C22.2 No. 250.0-08 Luminaires
 - : UL 2108 Low Voltage Lighting Systems
- CSA Class:




TOP VIEW

NOTE: Q-HEX-Mini must be used with Q-TRIX-R50 Housing.

Input	Output (max)	CSA Class
120V	12VAC	3426-04 Luminaires - Landscape Lighting Systems - Component 3426-94 Luminaires - Landscape Lighting Systems - Component - US
120V-277V	12VAC	3426-94 Luminaires - Landscape Lighting Systems - Component - US
120V-277V	24VAC	3425-15 Luminaires - Low Voltage Lighting Systems 3425-95 Luminaires - Low Voltage Lighting Systems - US

Q-HEX-Mini Details

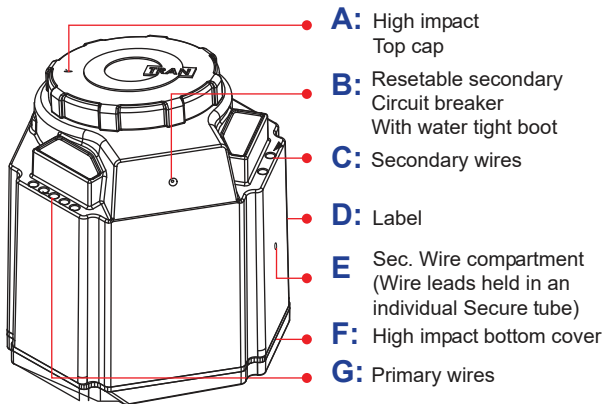

Transformer Unit

- Q-HEX-M10W
- Q-HEX-M20W
- Q-HEX-M50W
- Q-HEX-M75W

ORDERING GUIDE

Model	Size	Prim. V	Sec. V
Q-HEX	-	-	/
1. Size	Watts	Secondary Voltage (VAC)	Max Prim. Amps @ 120V / Max Prim. Amps @ 277V
M10W	10W	12/24	.15 A / .10 A
M20W	20W	12/24	.30 A / .15 A
M50W	50W	12/24	.75 A / .33 A
M75W	75W	12/24	1.1 A / .50 A
2. Primary Voltage			
120V	277V		
3. Secondary Voltage			
12VAC	24VAC		
ORDERING SAMPLE			
Q-HEX-M20W-120/12			



20190218-V1

PROJECT NAME	DATE	COMPANY	TYPE	NOTE