

# VERS-PROUD-SK (01)

Linear Fixtures - Suspended




## Fixture Finish

<p><b>SATIN</b></p>   <p>SATIN ANODIZED MATTE FINISH METAL ENDCAPS</p>	<p><b>BLACK</b></p>   <p>BLACK ANODIZED MATTE FINISH METAL ENDCAPS</p>	<p><b>BRONZE</b></p>   <p>BRONZE ANODIZED MATTE FINISH METAL ENDCAPS</p>	<p><b>WHITE</b></p>   <p>WHITE POWDER COAT PAINT GLOSSY FINISH METAL ENDCAPS</p>
---	--	--	--

## Mounting - Hardware


**SK-01**  
Suspension Bracket



2 required up to 6' lengths;  
additional support required  
between 6' to 8'

Suspension kits sold separately

## Light Orientation



## Compatible Accessory

Q-mini-J




## Lens with LED visibility



## Louver










L1-XX



WH BK  
0.70 0.54  
Lumen Multiplier

## Compatible Power Supplies

NOTE: Power supply compatibility is dependent on light engine chosen.


<b>QZ</b>	<b>iQ-PH-80</b>	<b>QTM-DC</b>	<b>QTM-DC+CAP</b>	<b>QTM-eLED</b>	<b>QTM-DRIVE</b>	<b>QTM-eLED+WD</b>	<b>QTM-eLED+AW</b>	<b>QTM-eLED+DMX</b>
								

# VERS-PROUD-SK (01)


Linear Fixtures - Suspended





## Input/Output



S2 - Input only

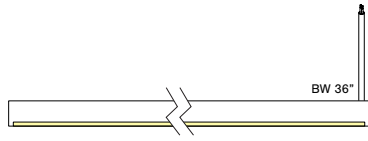

## Connectors/Wire



SW, SW-HE, SC  
wire shown


DW, RGB  
wire shown

## SUSPENSION WIRE

- 22 AWG
- Clear outer jacket
- Metal shield
- DRY / DMP
- 36" Standard length

## Suspension

Minimum (2) suspension kits needed per fixture

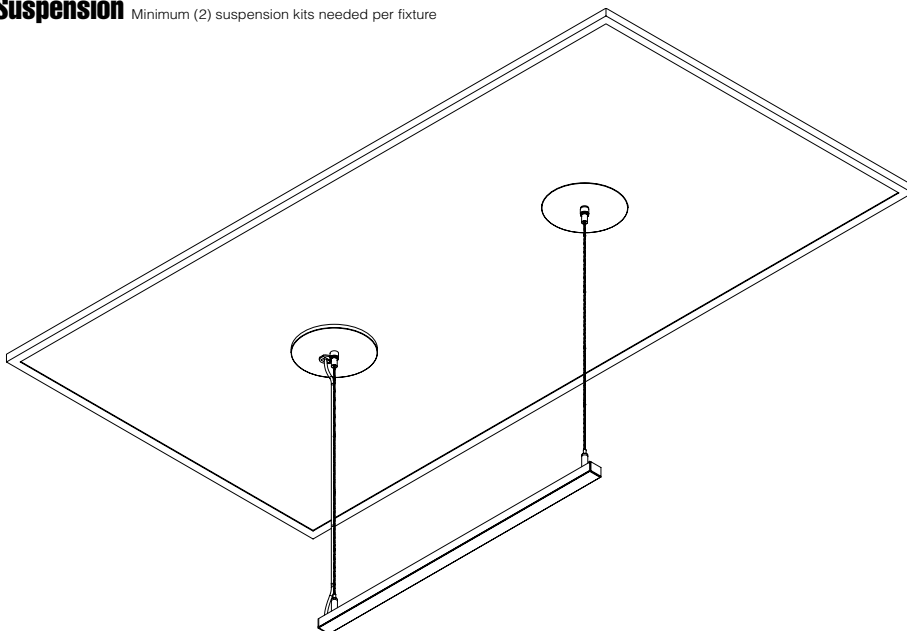

Close-Up

