

RESOURCE GUIDE - BUILDING A FIXTURE

STRIP - STATIC WHITE - SW24/7.5




BUILDING A FIXTURE

- 1 Fill out the ordering code on the STRIP cutsheet, choosing "MATCH" for ILLUMINATED LENGTH (IN).

| V/WATTS | RATED | CCT - LUMENS/CRI | ³ CONNECTOR/ WIRE IN | ³ CONNECTOR/ WIRE OUT | ILLUMINATED LENGTH (IN) |
|----------|-------|------------------|------------------------------------|-------------------------------------|-------------------------|
| SW24/7.5 | DRY | 30 | BW | CLS | MATCH |

The strip you just created will now be *fitted* and installed into an extrusion. The strip and extrusion will not be equal in length; the strip will stop just short of the extrusion's endcaps.

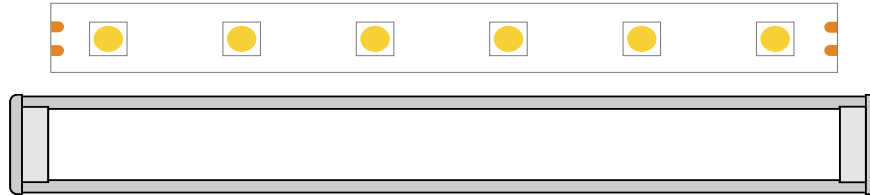

- 2 Fill out the ordering code for the EXTRUSION cutsheet and choose a non-encapsulated lens (Clear, Frosted, Polar, or Diffused).

| PRODUCT | FINISH | MOUNTING | LENS | TYPE | FINISHED FIXTURE LENGTH (IN) |
|---------|--------|----------|------|------|---------------------------------|
| TORQ | ST | SST | CL | S1 | 12" |



RESOURCE GUIDE - BUILDING A FIXTURE


STRIP - STATIC WHITE - SW24/7.5



RATED

DRY

- 2" Cutpoints
- Field Cuttable
- Lengths up to 153"

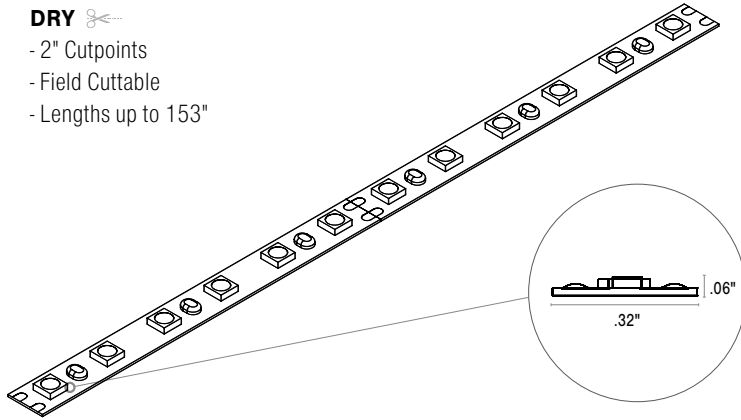

COMPATIBLE EXTRUSIONS



RESOURCE GUIDE - COLOR DATA




STRIP - STATIC WHITE - SW24/7.5



2000K

1999 K

CRI: 92.8
 CRI R9: 60.8
 TM30 Rf: 85.4
 TM30 Rg: 106.0
 CQS: 76.4
 X: 0.520
 Y: 0.404
 U: 0.306
 V: 0.356
 Δuv: -0.0030






| R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 94.1 | 97.8 | 97.9 | 92.8 | 94.0 | 97.0 | 88.9 | 79.7 | 60.8 | 93.2 | 94.6 | 93.4 | 95.5 | 97.3 | 89.3 | |
| Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 | Q10 | Q11 | Q12 | Q13 | Q14 | Q15 | |
| 72.3 | 82.8 | 79.1 | 79.6 | 81.3 | 75.0 | 68.1 | 71.2 | 82.7 | 80.7 | 78.6 | 76.6 | 76.4 | 77.4 | 76.7 | |
| C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 |
| 88.4 | 83.7 | 79.8 | 82.7 | 85.0 | 82.3 | 79.0 | 83.8 | 89.9 | 93.3 | 89.3 | 87.0 | 86.5 | 68.1 | 82.3 | 85.1 |

| TM30 | | | |
|---------|----------------|--------|------|
| Hue Bin | R _f | Chroma | Hue |
| 1 | 88 | -5% | -1% |
| 2 | 84 | -3% | 7% |
| 3 | 80 | 1% | 10% |
| 4 | 83 | 9% | 9% |
| 5 | 85 | 13% | 5% |
| 6 | 82 | 13% | -1% |
| 7 | 79 | 7% | -11% |
| 8 | 84 | 1% | -11% |
| 9 | 90 | -2% | -5% |
| 10 | 93 | -3% | 1% |
| 11 | 89 | 1% | 5% |
| 12 | 87 | 4% | 3% |
| 13 | 86 | 8% | -9% |
| 14 | 68 | 3% | -16% |
| 15 | 82 | 1% | -12% |
| 16 | 85 | -3% | -9% |

2200K

2237 K

CRI: 95.8
 CRI R9: 86.6
 TM30 Rf: 94.8
 TM30 Rg: 102.5
 CQS: 89.8
 X: 0.498
 Y: 0.409
 U: 0.288
 V: 0.355
 Δuv: -0.0020






| R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 97.3 | 97.1 | 99.1 | 96.6 | 96.3 | 92.2 | 94.7 | 93.2 | 86.6 | 95.8 | 91.8 | 87.8 | 96.5 | 98.1 | 98.4 | |
| Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 | Q10 | Q11 | Q12 | Q13 | Q14 | Q15 | |
| 88.1 | 89.6 | 92.0 | 92.3 | 91.2 | 89.4 | 88.2 | 89.3 | 91.1 | 92.0 | 91.9 | 91.4 | 90.6 | 87.7 | 88.9 | |
| C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 |
| 95.9 | 96.4 | 94.0 | 97.0 | 96.0 | 93.0 | 96.1 | 94.7 | 96.3 | 97.4 | 95.2 | 93.5 | 90.0 | 83.3 | 95.5 | 92.6 |

| TM30 | | | |
|---------|----------------|--------|------|
| Hue Bin | R _f | Chroma | Hue |
| 1 | 96 | -2% | 1% |
| 2 | 96 | 0% | 1% |
| 3 | 94 | 1% | 2% |
| 4 | 97 | 1% | 0% |
| 5 | 96 | 2% | 1% |
| 6 | 93 | 4% | 2% |
| 7 | 96 | 2% | -1% |
| 8 | 95 | 3% | -2% |
| 9 | 96 | 1% | -1% |
| 10 | 97 | 1% | -1% |
| 11 | 95 | 3% | -1% |
| 12 | 93 | 2% | -3% |
| 13 | 90 | 2% | -9% |
| 14 | 83 | 0% | -11% |
| 15 | 96 | -1% | -2% |
| 16 | 93 | -2% | -4% |

2400K

2465 K

CRI: 96.2
 CRI R9: 90.4
 TM30 Rf: 95.1
 TM30 Rg: 102.8
 CQS: 93.0
 X: 0.475
 Y: 0.405
 U: 0.275
 V: 0.352
 Δuv: -0.0030



| R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 97.0 | 97.0 | 98.9 | 96.7 | 96.3 | 92.9 | 95.5 | 95.0 | 90.4 | 95.6 | 92.8 | 89.0 | 96.3 | 98.3 | 99.4 | |
| Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 | Q10 | Q11 | Q12 | Q13 | Q14 | Q15 | |
| 92.2 | 93.4 | 93.5 | 94.8 | 95.1 | 92.3 | 90.3 | 92.0 | 94.8 | 94.6 | 94.6 | 94.2 | 93.7 | 91.3 | 92.8 | |
| C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 |
| 96.7 | 96.7 | 94.9 | 96.4 | 95.8 | 93.4 | 95.5 | 95.3 | 96.8 | 97.8 | 95.0 | 92.1 | 91.0 | 89.7 | 95.9 | 91.8 |

| TM30 | | | |
|---------|----------------|--------|-----|
| Hue Bin | R _f | Chroma | Hue |
| 1 | 97 | -1% | 0% |
| 2 | 97 | 0% | 1% |
| 3 | 95 | 1% | 2% |
| 4 | 96 | 0% | 0% |
| 5 | 96 | 2% | 1% |
| 6 | 93 | 4% | 1% |
| 7 | 95 | 2% | -1% |
| 8 | 95 | 2% | -2% |
| 9 | 97 | 1% | 0% |
| 10 | 98 | 1% | 0% |
| 11 | 95 | 3% | 1% |
| 12 | 92 | 4% | -3% |
| 13 | 91 | 2% | -6% |
| 14 | 90 | 2% | -6% |
| 15 | 96 | 0% | -2% |
| 16 | 92 | -1% | -5% |

NOTES:

- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - COLOR DATA




STRIP - STATIC WHITE - SW24/7.5



2700K

2742 K

CRI: 97.5
 CRI R9: 91.7
 TM30 Rf: 94.9
 TM30 Rg: 101.3
 CQS: 95.1
 X: 0.453
 Y: 0.404
 U: 0.261
 V: 0.349
 Δuv: -0.0021






| R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 98.1 | 98.4 | 98.1 | 98.4 | 98.2 | 95.8 | 96.8 | 96.1 | 91.7 | 98.8 | 95.8 | 89.1 | 97.8 | 97.7 | 99.3 | |
| Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 | Q10 | Q11 | Q12 | Q13 | Q14 | Q15 | |
| 94.0 | 95.7 | 93.1 | 93.8 | 96.3 | 96.4 | 93.7 | 95.2 | 97.6 | 96.3 | 96.5 | 96.7 | 96.6 | 94.5 | 94.7 | |
| C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 |
| 96.2 | 97.4 | 96.3 | 95.8 | 95.7 | 96.3 | 94.4 | 98.0 | 96.1 | 94.0 | 93.1 | 91.8 | 93.1 | 92.2 | 94.5 | 90.5 |

| TM30 | | | |
|---------|----------------|--------|-----|
| Hue Bin | R _f | Chroma | Hue |
| 1 | 96 | -1% | 1% |
| 2 | 97 | 0% | 0% |
| 3 | 96 | 0% | 1% |
| 4 | 96 | -2% | -1% |
| 5 | 96 | -1% | 1% |
| 6 | 96 | 2% | 1% |
| 7 | 94 | -1% | 1% |
| 8 | 98 | 1% | 0% |
| 9 | 96 | 1% | 2% |
| 10 | 94 | 1% | 3% |
| 11 | 93 | 3% | 4% |
| 12 | 92 | 4% | -1% |
| 13 | 93 | 2% | -4% |
| 14 | 92 | 3% | -5% |
| 15 | 95 | -1% | -1% |
| 16 | 90 | 0% | -7% |

3000K

3034 K

CRI: 97.6
 CRI R9: 93.5
 TM30 Rf: 94.2
 TM30 Rg: 101.3
 CQS: 95.2
 X: 0.431
 Y: 0.395
 U: 0.251
 V: 0.344
 Δuv: -0.0029






| R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 98.0 | 98.3 | 98.0 | 98.9 | 98.3 | 96.0 | 97.0 | 96.7 | 93.5 | 98.6 | 96.7 | 86.8 | 97.7 | 97.9 | 98.8 | |
| Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 | Q10 | Q11 | Q12 | Q13 | Q14 | Q15 | |
| 94.6 | 96.8 | 92.1 | 92.5 | 95.6 | 97.7 | 94.3 | 95.7 | 97.7 | 96.4 | 96.4 | 96.8 | 96.9 | 95.3 | 95.4 | |
| C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 |
| 95.8 | 97.2 | 96.0 | 96.0 | 93.8 | 96.6 | 93.8 | 98.3 | 94.4 | 91.5 | 91.0 | 91.7 | 93.9 | 92.0 | 92.4 | 89.8 |

| TM30 | | | |
|---------|----------------|--------|-----|
| Hue Bin | R _f | Chroma | Hue |
| 1 | 96 | -1% | 1% |
| 2 | 97 | 0% | 0% |
| 3 | 96 | 0% | 1% |
| 4 | 96 | -1% | 0% |
| 5 | 94 | -3% | 1% |
| 6 | 97 | 1% | 1% |
| 7 | 94 | -1% | 2% |
| 8 | 98 | 0% | 0% |
| 9 | 94 | 0% | 3% |
| 10 | 92 | 1% | 4% |
| 11 | 91 | 3% | 5% |
| 12 | 92 | 4% | 0% |
| 13 | 94 | 2% | -4% |
| 14 | 92 | 3% | -4% |
| 15 | 92 | 0% | -2% |
| 16 | 90 | 1% | -7% |

3500K

3495 K

CRI: 97.9
 CRI R9: 96.9
 TM30 Rf: 93.4
 TM30 Rg: 100.6
 CQS: 96.3
 X: 0.403
 Y: 0.382
 U: 0.237
 V: 0.338
 Δuv: -0.0031



| R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 97.7 | 98.4 | 97.8 | 99.5 | 98.0 | 96.1 | 97.6 | 98.0 | 96.9 | 98.8 | 97.5 | 82.9 | 97.7 | 97.9 | 97.5 | |
| Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 | Q10 | Q11 | Q12 | Q13 | Q14 | Q15 | |
| 95.5 | 98.8 | 92.2 | 92.1 | 95.5 | 98.7 | 96.9 | 98.1 | 98.6 | 97.9 | 97.8 | 98.5 | 98.7 | 97.4 | 97.1 | |
| C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 |
| 95.1 | 97.0 | 96.1 | 94.7 | 92.9 | 97.0 | 94.2 | 96.0 | 92.6 | 89.3 | 88.8 | 91.7 | 94.9 | 92.2 | 91.5 | 90.8 |

| TM30 | | | |
|---------|----------------|--------|-----|
| Hue Bin | R _f | Chroma | Hue |
| 1 | 95 | -1% | 1% |
| 2 | 97 | 0% | 0% |
| 3 | 96 | 0% | 1% |
| 4 | 95 | -2% | -1% |
| 5 | 93 | -4% | 0% |
| 6 | 97 | 0% | 1% |
| 7 | 94 | -2% | 2% |
| 8 | 96 | -1% | 2% |
| 9 | 93 | 0% | 5% |
| 10 | 89 | 1% | 7% |
| 11 | 89 | 4% | 6% |
| 12 | 92 | 4% | 1% |
| 13 | 95 | 1% | -3% |
| 14 | 92 | 4% | -3% |
| 15 | 92 | 1% | -2% |
| 16 | 91 | 1% | -4% |

NOTES:

- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - COLOR DATA




STRIP - STATIC WHITE - SW24/7.5



4000K

4025 K

CRI: 98.1
CRI R9: 98.4
TM30 Rf: 92.5
TM30 Rg: 100.6
CQS: 95.2
X: 0.378
Y: 0.369
U: 0.226
V: 0.332
Δuv: -0.0027



| R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 98.3 | 99.2 | 96.4 | 99.2 | 97.9 | 96.0 | 98.7 | 98.7 | 98.4 | 97.7 | 97.7 | 78.1 | 98.8 | 97.3 | 96.9 | |
| Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 | Q10 | Q11 | Q12 | Q13 | Q14 | Q15 | |
| 95.5 | 99.4 | 89.6 | 89.3 | 93.7 | 96.9 | 96.7 | 98.3 | 97.5 | 97.0 | 96.8 | 97.9 | 98.7 | 98.1 | 97.4 | |
| C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 |
| 94.8 | 96.7 | 95.8 | 93.5 | 92.1 | 96.4 | 95.0 | 93.6 | 90.1 | 88.1 | 86.2 | 91.6 | 94.3 | 94.4 | 90.0 | 89.9 |

| TM30 | | | |
|---------|----------------|--------|-----|
| Hue Bin | R _f | Chroma | Hue |
| 1 | 95 | 0% | 0% |
| 2 | 97 | 0% | 0% |
| 3 | 96 | 0% | 1% |
| 4 | 93 | -2% | -1% |
| 5 | 92 | -4% | 0% |
| 6 | 96 | -1% | 1% |
| 7 | 95 | -2% | 2% |
| 8 | 94 | -1% | 3% |
| 9 | 90 | -1% | 7% |
| 10 | 88 | 0% | 7% |
| 11 | 86 | 4% | 8% |
| 12 | 92 | 3% | 2% |
| 13 | 94 | 3% | -1% |
| 14 | 94 | 2% | 0% |
| 15 | 90 | 3% | -3% |
| 16 | 90 | 2% | -5% |

NOTES:

- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - CONNECTORS/WIRE

STRIP - STATIC WHITE



CONNECTORS/WIRE

BARE WIRE

- Belden Wire 22 AWG
- Outdoor rated
- 24" Standard length



BARE WIRE

DRY BARREL

- 22 AWG
- Dry rated
- 6" Standard length



MALE
INPUT CONNECTOR



FEMALE
OUTPUT CONNECTOR

RELATED PRODUCTS



Sold: Individually



Junction Box that allows for splicing of LED Lead wires

*Full ordering guide available for this product


RELATED PRODUCTS



Sold: Individually



Two Females and one Male



Sold: Individually



Four Females and one Male



Sold: Individually



Connects a Male Barrel to a Male Barrel



Sold: Individually



Connects a Female Barrel to a Female Barrel

RESOURCE GUIDE - LUMEN MULTIPLIER STRIP IN EXTRUSION



FINISH

ST Satin finish **BK** Black finish **BZ** Bronze finish

LENS **CL** Clear **FR** Frosted **PR** Polar **DF** Diffused




LUMEN MULTIPLIER FORMULA


Bare LED Lumens x Extrusion Finish/Lens Value


Example:


$$535 \text{ lm/ft} \times 0.68 = 363.8 \text{ lm/ft}$$


SW24/7.5 at 3000K x TORQ Extrusion in Black with FR Lens


| SLIM | Lens | Finish | | |
|--|------|--------|-------|---------------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .24" .60" | CL | 0.90 | 0.82 | Not Available |
| | DF | 0.70 | 0.59 | Available |


| WIDE | Lens | Finish | | |
|---|------|--------|-------|--------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .34" .90" | CL | 0.86 | 0.78 | 0.78 |
| | PR | 0.80 | 0.72 | 0.72 |
| | DF | 0.73 | 0.59 | 0.59 |


| ROND | Lens | Finish | | |
|---|------|--------|-------|---------------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .48" .62" | CL | 0.84 | ** | Not Available |
| | FR | 0.81 | ** | Not Available |
| | DF | 0.57 | ** | Available |


| VEGA | Lens | Finish | | |
|--|------|--------|---------------|---------------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .47" .61" | CL | 0.89 | Not Available | Not Available |
| | | | Available | Available |


| TORQ | Lens | Finish | | |
|---|------|--------|-------|--------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .61" .70" | CL | 0.74 | 0.68 | 0.68 |
| | FR | 0.66 | 0.68 | 0.68 |
| | PR | 0.62 | 0.64 | 0.64 |
| | DF | 0.50 | 0.32 | 0.32 |


| TRE3 | Lens | Finish | | |
|---|------|--------|---------------|---------------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .27" .74" | DF | 0.78 | Not Available | Not Available |
| | | | Available | Available |


| ARKA | Lens | Finish | | |
|--|------|--------|-------|--------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .63" .63" | CL | 0.96 | 0.95 | 0.95 |
| | FR | 0.91 | 0.93 | 0.93 |
| | PR | 0.88 | 0.90 | 0.90 |
| | DF | 0.79 | 0.66 | 0.66 |

| TELA | Lens | Finish | | |
|---|------|--------|-------|--------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .63" .63" | CL | 0.86 | 0.85 | 0.85 |
| | PR | 0.86 | 0.86 | 0.86 |
| | DF | 0.79 | 0.78 | 0.78 |
| | | | | |

| VEVE | Lens | Finish | | |
|---|------|--------|-------|---------------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .71" .71" | CL | 0.83 | 0.70 | Not Available |
| | FR | 0.76 | 0.63 | Not Available |
| | PR | 0.74 | 0.58 | Available |
| | DF | 0.63 | 0.44 | Available |

| FLUR | Lens | Finish | | |
|--|------|--------|-------|---------------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .75" .70" | CL | 0.71 | 0.51 | Not Available |
| | FR | 0.59 | 0.43 | Not Available |
| | PR | 0.55 | 0.37 | Not Available |
| | DF | 0.44 | 0.25 | Available |

| LATO | Lens | Finish | | |
|---|------|--------|-------|--------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .41" .70" | CL | 0.85 | 0.69 | 0.69 |
| | FR | 0.77 | 0.63 | 0.63 |
| | PR | 0.76 | 0.60 | 0.60 |
| | DF | 0.64 | 0.45 | 0.45 |

| MDIN | Lens | Finish | | |
|--|------|--------|---------------|---------------|
| | | Satin | Black | Bronze |
| | | (ST) | (BK) | (BZ) |
|  .58" 1.98" | DF | 0.57 | Not Available | Not Available |
| | | | Available | Available |

 Diode free or near Diode free

NOTES: • Data subject to change, all data has +/- 5% tolerance


ACCESSORIES STRIP



MOUNTING

| | |
|--------------|-----|
| iQ-STRAP-10* | QTY |
|--------------|-----|


Sold: In packs of 10



Rubber Strap
Fits DRY, DMP, WET

| | |
|--------------|-----|
| iQ-CLIP-SS10 | QTY |
|--------------|-----|


Sold: Individually



Metal Clip
Fits DMP, WET

| | |
|--------------|-----|
| iQ-CLIP-SS12 | QTY |
|--------------|-----|


Sold: Individually



Metal Clip
Fits DMP

| | |
|------------|-----|
| iQ-CLIP-PL | QTY |
|------------|-----|

Sold: Individually




Rubber Clip
Fits DMP, WET

*1 strap included with every 1 ft. of bare LED

| | |
|------------|-----|
| iQ-VHB-STD | QTY |
|------------|-----|


Sold: In feet



Adhere LED to smooth surface
including extrusion

| | |
|------------|-----|
| iQ-VHB-CON | QTY |
|------------|-----|

Sold: In feet




Adhere LED to concrete surface

CONNECTION

| | |
|-----------|-----|
| iQ-INLINE | QTY |
|-----------|-----|


Sold: Individually



Joins two LEDs together

| | |
|-------------|-----|
| iQ-CMP-LEAD | QTY |
|-------------|-----|


Sold: Individually



Joins lead wire to LED

| | |
|-------------|-----|
| iQ-CMP-JUMP | QTY |
|-------------|-----|

Sold: Individually



Jump wire w/ crimp connectors
to join two LEDs

| | |
|---------|-----|
| TWO-FER | QTY |
|---------|-----|

Sold: Individually



Two Females and one Male

| | |
|----------|-----|
| FOUR-FER | QTY |
|----------|-----|

Sold: Individually



Four Females and one Male

| | |
|-------------|-----|
| MALE BENDER | QTY |
|-------------|-----|

Sold: Individually



Connects a Male Barrel to a
Male Barrel

| | |
|---------------|-----|
| FEMALE BENDER | QTY |
|---------------|-----|

Sold: Individually



Connects a Female Barrel
to a Female Barrel

KITS & WIRE

iQ-LEAD-18-KIT Includes (1) 18" lead wire, (1) 1" heat shrink tubing, (1) 1/2" heat shrink tubing, (1) 6" solder

iQ-JUMP-6-KIT Includes (1) 6" lead wire, (2) 1" heat shrink tubing, (2) 1/2" heat shrink tubing, (1) 6" solder

iQ-LEAD-67-KIT Includes (1) 18" lead wire, (1) 6" solder, (1) lead wire end cap, (1) end cap

iQ-JUMP-67-KIT Includes (1) 16" lead wire, (1) 6" solder, (2) lead wire end cap


iQ-WSW LED lead wire available in custom lengths, 1,000' reel

| | | |
|----------------|-------------------|-----|
| iQ-LEAD-18-KIT | Sold individually | QTY |
| iQ-JUMP-6-KIT | Sold individually | QTY |
| iQ-LEAD-67-KIT | Sold individually | QTY |
| iQ-JUMP-67-KIT | Sold individually | QTY |
| iQ-WSW | Sold in inches | QTY |

JUNCTION BOX

Q-mini-J

Junction box that allows for splicing of LED lead wires
(Full ordering guide available for this product)



| | | |
|----------|-------------------|-----|
| Q-mini-J | Sold individually | QTY |
|----------|-------------------|-----|

| PROJECT NAME | DATE | COMPANY | TYPE | NOTE |
|--------------|------|---------|------|------|
| | | | | |