


ROND


EXTRUSIONS - ALUMINUM

Model: iQA

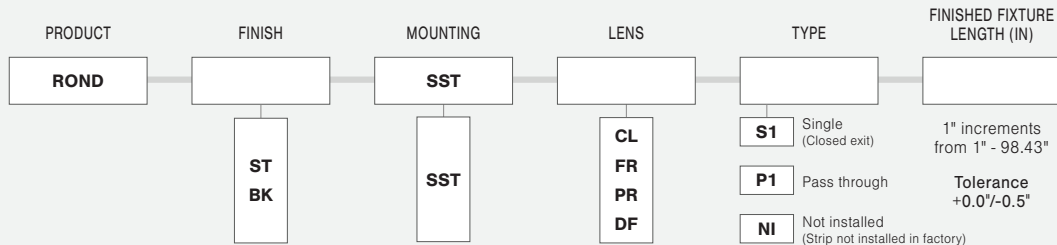

- NOTES:**
- UL Listed when assembled with STRIP LEDs at Q-Tran
 - NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, with 4.0 w/ft or less, at Q-Tran facility (Not applicable for encapsulation)
 - Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void

FINISH




MOUNTING

NOTE: 2 clips provided for 4' or less;
4 clips provided for greater than 4'




Black clip standard with black extrusion


LENS with LED visibility

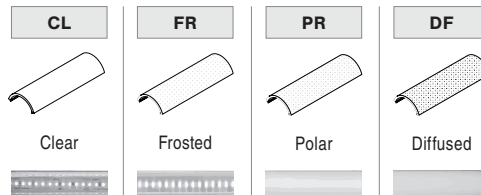

DIMENSIONS




Profile




Profile with Stainless Steel Mounting Clip

TYPE


SINGLE (Input only)




PASS THROUGH (Input/Output)




ORDER EXAMPLE



END CAPS




LENGTH (IN) : Add to nominal LED length for fixture length

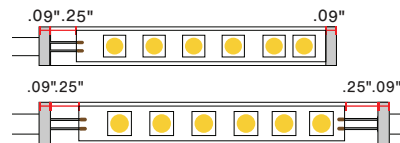


	Endcap#1	Endcap#2	Space to solder wire
S1	.09"	.09"	.25"
= .43"			
P1	.09"	.09"	2(.25")
= .68"			

CUT OFF



ROTATION : 45° ROTATION



COMPATIBLE LEDs

STATIC WHITE (SW)				DYNAMIC WHITE (DW)				STATIC COLOR (SC)				RGB			RGBW		
DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	ENC	DRY	DMP	ENC
✓	✓	✗	✗	✓	✓	✗	✗	✓	✓	✗	✗	✓	✓	✗	✗	✗	✗
✓ = Compatible				✗ = NOT Compatible				◆ = NOT Compatible with 6.0 & 7.5 strips									

PROJECT NAME	DATE	COMPANY	TYPE	NOTE