FLUR

EXTRUSIONS - ALUMINUM

Model: iQA

c UL us LISTED | RoHS COMPLIANT | NEC 410.2 and 410.16 | RECESSABLE

PRODUCT	FINISH	MOUNTING	LENS	TYPE	FINISHED FIXTURE LENGTH (IN)
FLUR	ST BK	SST	CL/45 CL/60 CL/80 FR PR DF ENC/CL ENC/TL	S1 S2 — Single (Closed exit) P1 P2 — Pass through NI — Not installed (Strip not installed in factory)	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"

NOTES:
- UL Listed when assembled with STRIP LEDs at Q-Tran
- NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, with 4.0 w/ft or less, at Q-Tran facility (Not applicable for encapsulation)
- Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void
- Recess mounted with adhesive only

FINISH

ST — Satin | BK — Black

MOUNTING

NOTE: 2 clips provided for 4' or less; 4 clips provided for greater than 4'

SST — Stainless Steel



LENS with LED visibility

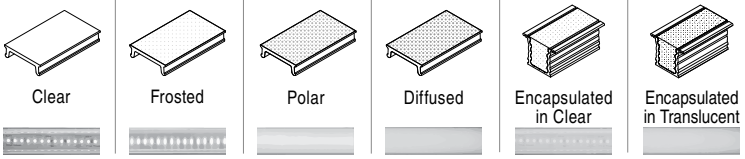

DIMENSIONS



Profile



Profile with Stainless Steel Mounting Clip

TYPE

SINGLE (Input only)



END CAPS

ENDCAP





PASS THROUGH (Input/Output)



ORDER EXAMPLE



LENGTH (IN) : Add to nominal LED length for fixture length





CUT OFF

CL/45	CL/60	CL/80
45°	60°	80°
Clear 45°	Clear 60°	Clear 80°

COMPATIBLE LEDs

STATIC WHITE (SW)				DYNAMIC WHITE (DW)				STATIC COLOR (SC)				RGB				RGBW			
DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC
✓	◆	◆	◆	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✗	✗	✗	✗

✓ = Compatible ✗ = NOT Compatible ◆ = NOT Compatible with 6.0 & 7.5 strips

PROJECT NAME	DATE	COMPANY	TYPE	NOTE

© 2020 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com | Specification subject to change | Rev-0717-20

RESOURCE GUIDE

EXTRUSIONS - SURFACE - LALO

Model: iQA

FINISH

SATIN



SATIN ANODIZED
MATTE FINISH
GREY ENDCAPS

BLACK



BLACK ANODIZED
MATTE FINISH
BLACK ENDCAPS

MOUNTING TYPE - SURFACE

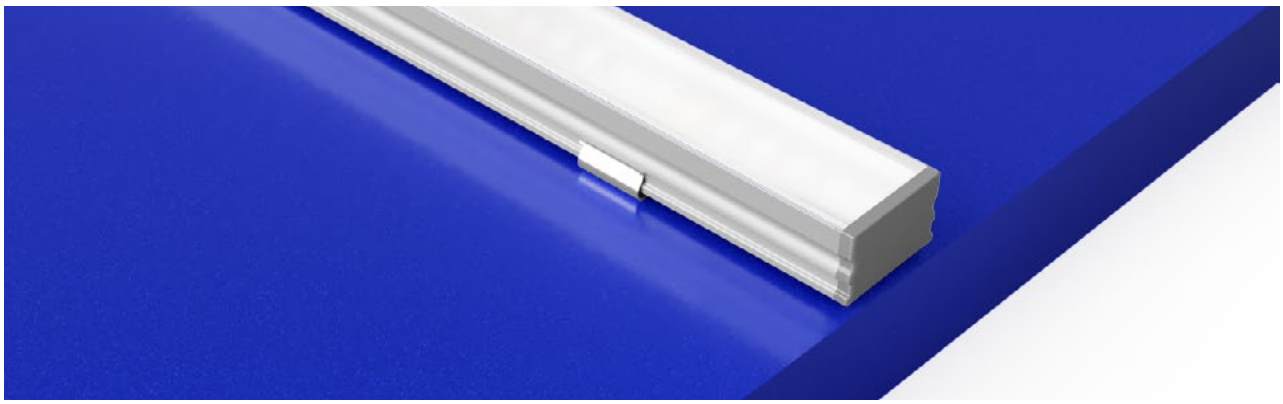

MOUNTING - HARDWARE

Stainless Steel
(LALO-SST)



2 clips provided for 4' or less;
4 clips provided for greater than 4'

- Stainless Steel
- Indoor/Outdoor
- #4 x 5/8" Flat Head SS (1 per clip included)

832
(see Accessory cutsheet)



- Strong adhesive
- Not submersible, For dry and wet locations only

Q-ANGLE
(see Accessory cutsheet)



- Adjustable mounting bracket
- Indoor/Outdoor

PIVOT BRACKET
(see Accessory cutsheet)



- Adjustable mounting bracket
- Indoor

LENS

CL Clear | **FR** Frosted | **PR** Polar | **DF** Diffused

ENC/CL Encapsulated in Clear

ENC/TL Encapsulated in Translucent

© 2020 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com | Specification subject to change | Rev-07-17-20

RESOURCE GUIDE

EXTRUSIONS - SURFACE - LALO

Model: iQA

CONNECTORS/WIRE

STATIC WHITE AND STATIC COLOR ONLY

LIGHT ORIENTATION

BARE WIRE 24"

DRY BARREL 6"

WET BARREL 6"



SYMMETRICAL

TYPE To order a bare extrusion without a strip installed in Q-Tran factory, choose **NI** (Not Installed) for your Type option



S1 - Input only



P1 - Input/Output

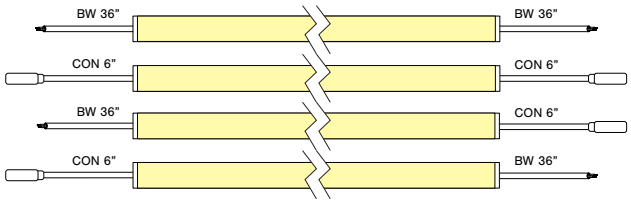



S2 - Input only

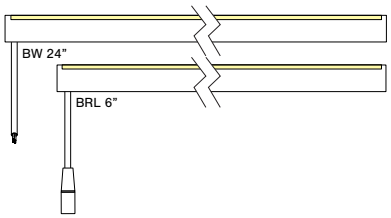

P2 - Input/Output

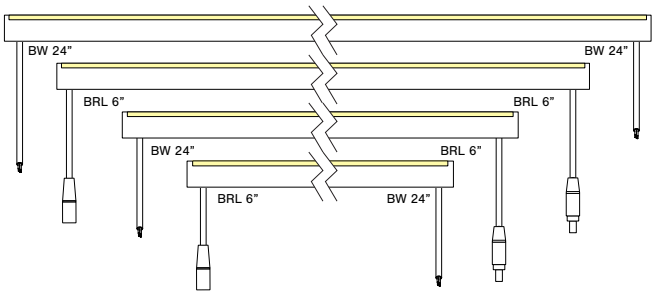

© 2020 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com | Specification subject to change | Rev-07-17-20

RESOURCE GUIDE - COMPATIBILITY
EXTRUSIONS & STRIPS

STRIP AND EXTRUSION COMPATIBILITY

EXTRUSIONS	STATIC WHITE					DYNAMIC WHITE				STATIC COLOR				RGB				RGBW			
	1.5 - 7.5 W/ft				IA5.0W/ft	6.0 W/ft				5.0 W/ft				6.0 W/ft				6.0 W/ft			
	DRY	DMP	WET	ENC	DRY	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC
SLIM	◆	◆	◇	✗	✓	✓	✓	✗	✗	✓	✓	◇	✗	✓	✓	✗	✗	✗	✗	✗	✗
WIDE	✓	◆	◆	✗	✓	✓	✓	✓	✗	✓	✓	✓	✗	✓	✓	✓	✗	✓	✓	✓	✗
ROND	✓	◆	✗	✗	✓	✓	✓	✗	✗	✓	✓	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗
VEGA	✓	◆	✗	✗	✓	✓	✓	✗	✗	✓	✓	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗
TORQ	✓	◆	◆	◆	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✗	✗	✗	✗
TRE3	✓	◆	◆	✗	✓	✓	✓	✗	✗	✓	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✗
ARKA	✓	◆	◆	✗	✓	✓	✓	✓	✗	✓	✓	✓	✗	✓	✓	✓	✗	✓	✓	✗	✗
TELA	✓	◆	◆	✗	✓	✓	✓	✓	✗	✓	✓	✓	✗	✓	✓	✓	✗	✓	✓	✗	✗
VEVE	✓	◆	◆	✗	✓	✓	✓	✗	✗	✓	✓	✓	✗	✓	✓	✗	✗	✓	✓	✗	✗
FLUR	✓	◆	◆	◆	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✗	✗	✗	✗
LATO	✓	◆	◆	◆	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✗	✗	✗	✗
LALO	✓	◆	◆	◆	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓
TALO	✓	◆	◆	◆	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓
MDIN	●	◆	✗	✗	✓	✓	✓	✗	✗	✓	✓	✗	✗	✓	✓	✗	✗	✓	✓	✗	✗

✓ = Compatible
✗ = NOT Compatible
◆ = NOT Compatible with 6.0 & 7.5 strips
◇ = Wet rated but with no lens
● = NOT Compatible with 7.5 strip

MOUNTING INSTALLATION
EXTRUSIONS - FLANGED -FLUR
Model: iQA

MOUNTING NOTE: 2 clips provided for 4' or less;
4 clips provided for greater than 4'



FLUR - SST
Stainless Steel

Screw Mounting

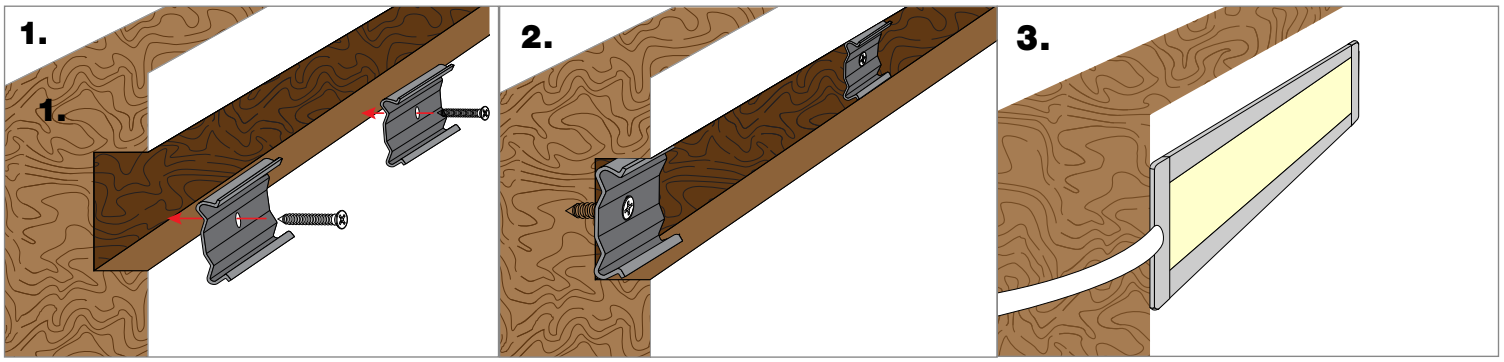

832 Silicone Mounting

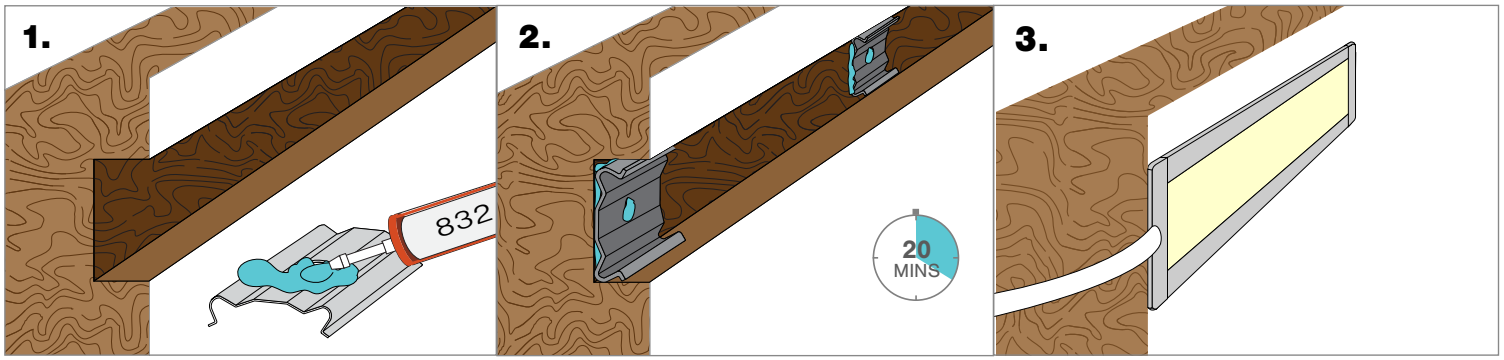

NOTE: 832 Silicone use in a well-ventilated area, 832 Silicone sold with Caulking gun. Do not use in any submersible applications.

VHB Mounting

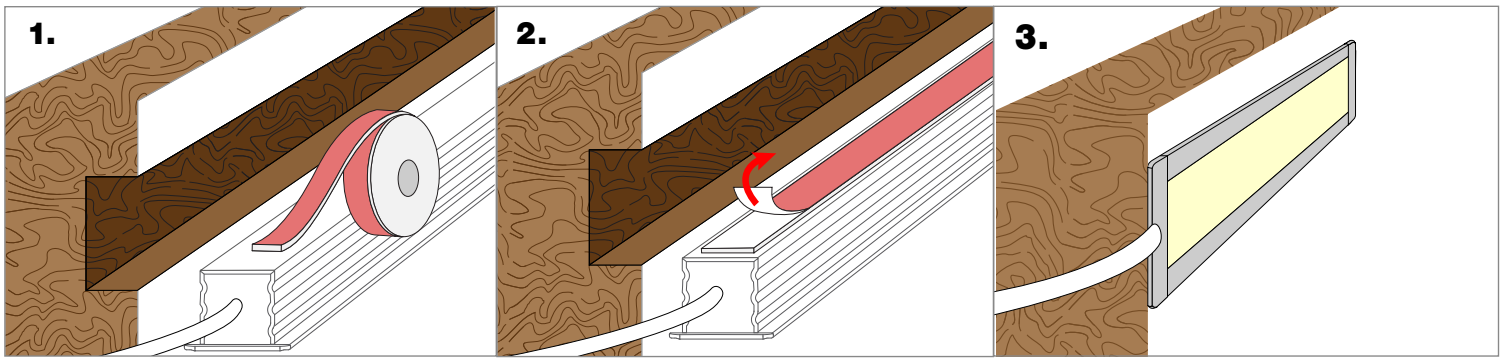

NOTES: • Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void

© 2020 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com | Specification subject to change | Rev-0717-16