




FLUR


EXTRUSIONS - ALUMINUM

Model: iQA

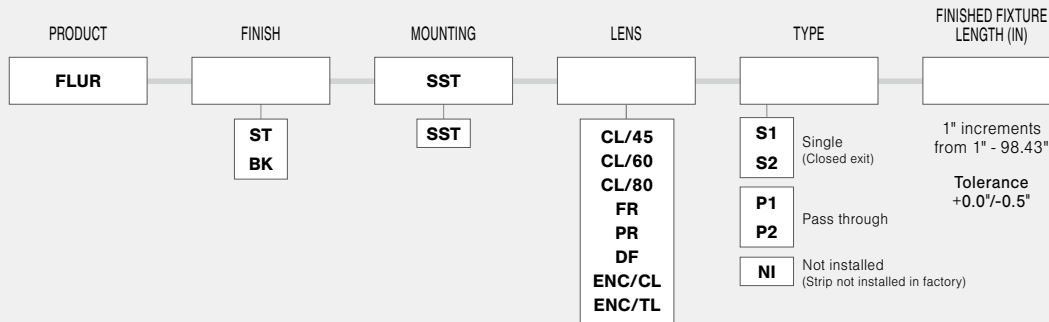

- NOTES:**
- UL Listed when assembled with STRIP LEDs at Q-Tran
 - NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, with 4.0 w/ft or less, at Q-Tran facility (Not applicable for encapsulation)
 - Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void
 - Recess mounted with adhesive only

FINISH




MOUNTING


NOTE: 2 clips provided for 4' or less;
4 clips provided for greater than 4'




LENS with LED visibility

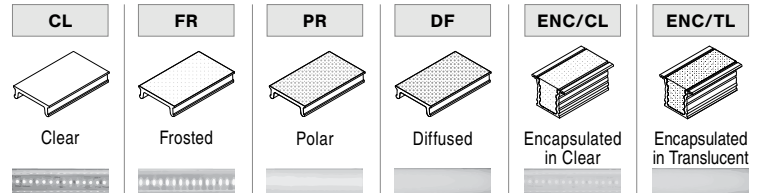

DIMENSIONS




Profile





Profile with
Stainless Steel Mounting Clip

TYPE


SINGLE (Input only)




END CAPS



PASS THROUGH (Input/Output)



ORDER EXAMPLE




LENGTH (IN) : Add to nominal LED length for fixture length



$$\begin{aligned} & \text{Endcap\#1} \\ & \text{Endcap\#2} \\ & \text{Space to solder wire} \\ \text{S1 } & .22'' + .22'' + .25'' = .69'' \\ \text{P1 } & .22'' + .22'' + 2(.25'') = .94'' \end{aligned}$$

CUT OFF



Clear 45° Clear 60° Clear 80°

COMPATIBLE LEDs

STATIC WHITE (SW)				DYNAMIC WHITE (DW)				STATIC COLOR (SC)				RGB			RGBW			
DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	DRY	DMP	WET	ENC
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

✓ = Compatible ✗ = NOT Compatible ◆ = NOT Compatible with 6.0 & 7.5 strips

PROJECT NAME	DATE	COMPANY	TYPE	NOTE