

# LATO

## EXTRUSIONS - ALUMINUM


Model: iQA



PRODUCT	FINISH	MOUNTING	LENS	TYPE	FINISHED FIXTURE LENGTH (IN)
LATO	ST BK BZ	SST	CL FR PR DF ENC/CL ENC/TL	S1 S2 P1 P2 NI	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"

- NOTES:**
- UL Listed when assembled with STRIP LEDs at Q-Tran
  - NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, with 4.0 w/ft or less, at Q-Tran facility (Not applicable for encapsulation)
  - Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void
  - Recess mounted with adhesive only

### FINISH




### MOUNTING


NOTE: 2 clips provided for 4' or less;  
4 clips provided for greater than 4'

LATO-SST QTY



Stainless Steel



### LENS

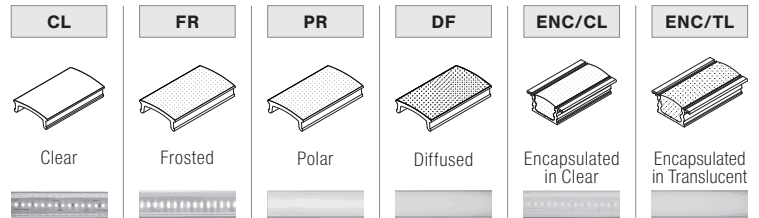


### DIMENSIONS




### TYPE


SINGLE (Input only)



PASS THROUGH (Input/Output)





ORDER EXAMPLE



### END CAPS

ENDCAP QTY



LENGTH (IN) : Add to nominal LED length for fixture length



$$\begin{aligned} & \text{Endcap\#1} \\ & \text{Endcap\#2} \\ & \text{Space to solder wire} \\ \text{S1 } & .22'' + .22'' + .25'' = .69'' \\ \text{P1 } & .22'' + .22'' + 2(.25'') = .94'' \end{aligned}$$

### CUT OFF

CL/100



Clear 100°

### COMPATIBLE LEDs

STATIC WHITE (SW)				DYNAMIC WHITE (DW)				STATIC COLOR (SC)				RGB			RGBW					
DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

✓ = Compatible  
 ✗ = NOT Compatible  
 ✓ = NOT Compatible with 6.0 & 7.5 strips

PROJECT NAME	DATE	COMPANY	TYPE	NOTE