



Q-Tran's QTM-DC is a surface mount, interior rated, rectified DC power supply. It is CSA listed for use with interior and submersible luminaires and LED luminaires, as well as submersible pumps. It is ideal for applications that require a larger power supply where perfect dimming is not a requirement. When dimming use a forward phase dimmer with a neutral wire. The QTM-DC in 24V can be used with Q-Tran iQ LED Flexible tape light and super flex.

HOUSING

- 18 gauge Welded Steel Enclosure: 14.5"L x 8.00"W x 4.00"D
- Door: 15.5"L x 9.00"W
- Knockouts: 25
- Built-in support bracket incorporated to secure housing for surface mounting



MULTI-VOLT & TAPS

- Primary Taps:
 - 12VDC : 11, 12, 13, 14, 15V
 - 24VDC : 22, 24, 26, 28, 30V
- Loads may be connected to one (1) of the primary taps up to the full watt rating of the PSC.
- 20% Derating required.
- The advantage is that loads at varying distances from the PSC can be tapped on different taps to recover voltage drop, allowing you to get the correct voltage at your load and produce between 85%-100% light output. (See Q-TRAN Voltage drop Calculator)
- Secondary Circuit Protection: 1-6 magnetic circuit breakers.

TOROIDAL CHOKE

Q-Tran's Standard Choke, or "Debuzzing Coil" reduces noise when dimming and helps negate in-rush current that is prevalent with LED loads. It allows for quiet operation and eliminates nuisance tripping.

*For information on this Power Supply please consult the Q-Tran Indoor catalog or visit the Q-Tran website.

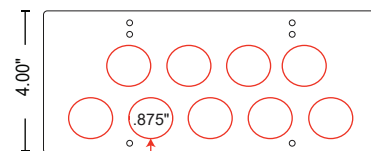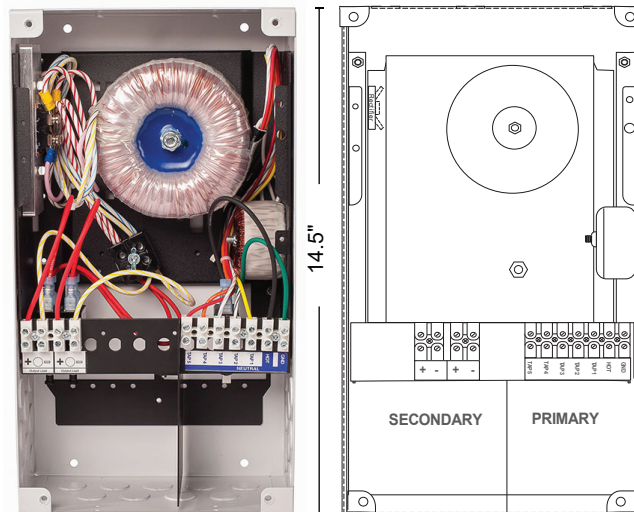

9 Knockouts of 0.875" Hole for 1/2" fitting


NOTE: 16 additional side knockouts

ORDERING GUIDE						
1	2	3	4	5	6	7
Model	Prim. V	Sec. V	No.	Brk Amp.	Choke	Opt
QTM-DC	-	/	-	x	+	+
1 Model (Size)	Max Load (Watts)	Fixture Load Volts (12VDC / 24VDC)	Max Prim. Amps@120V	Max Prim. Amps@277V		
60DC	60W	12V DC	0.9 A	0.4 A		
120DC	120W	12V DC	1.4 A	0.6 A		
180DC	180W	12V DC	2.0 A	0.9 A		
240DC	240W	12V DC	2.7 A	1.2 A		
300DC	300W	12V DC	3.4 A	1.5 A		
360DC	360W	12V DC	4.1 A	1.8 A		
60DC	60W	24V DC	0.9 A	0.4 A		
100DC	100W	24V DC	1.1 A	0.5 A		
200DC	200W	24V DC	2.2 A	1.0 A		
300DC	300W	24V DC	3.4 A	1.5 A		
500DC	500W	24V DC	5.6 A	2.4 A		
600DC	600W	24V DC	6.7 A	2.9 A		
2 Primary Voltage						
120 (60Hz) 220 (50/60Hz)* 230 (50/60Hz)* 240 (50/60Hz)* 277 (60Hz)						
3 Secondary Voltage						
12VDC 24VDC						
4 Number of Breakers						
1 to 6						
5 Secondary Breaker Amperage					7 Options	
AMPS	Max 12V Load	Max 24V Load				
2.5	30W	60W	WH White (Standard) BK Black Powder Coat Finish			
4	48W	96W				
5	60W	120W				
10	120W	240W				
15	180W	360W				
20	240W	480W				
25	300W	600W				
6 Choke						
CK-S 50W-300W						
CK-L 360W-600W						
Ordering Example						
QTM-60DC - 120/12 - 1x5 + CK - S						

*Not Standard, Call Factory For Pricing

LOW VOLTAGE LIGHTING POWER SUPPLY

- SURFACE MOUNTANY POSITION
- TESTED TO UL 2108 STANDARD
- WALL MOUNT/ROD SUSPENSION
- FOR SUPPLY CONNECTIONS USE WIRE RATED FORAT LEAST 75°C
- SUITABLE FOR DAMP LOCATIONS
- USE DIMMERS RATED FOR MAGNETIC LOW VOLTAGE LOAD WITH NEUTRAL WIRE
- ISOLATION TOROIDAL TRANSFORMER
- 50/60 CYCLE
- MADE IN THE U.S.A.



CE C US 239924

2020-02-10-V1

PROJECT NAME	DATE	COMPANY	TYPE	NOTE