


TORQ EXTRUSIONS - ALUMINUM

Model: iQA

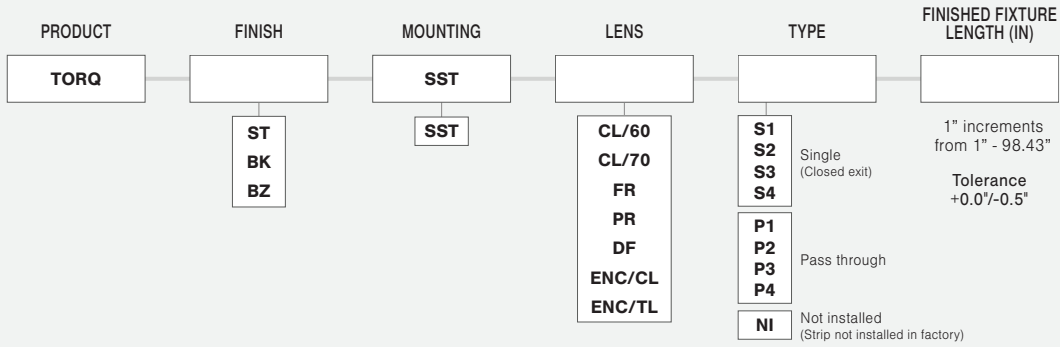

- NOTES:**
- UL Listed when assembled with STRIP LEDs at Q-Tran
 - NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, with 4.0 w/ft or less, at Q-Tran facility (Not applicable for encapsulation)
 - Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void

FINISH

ST	BK	BZ

Satin Black Bronze

MOUNTING NOTE: 2 clips provided for 4' or less; 4 clips provided for greater than 4'

TORQ-SST QTY

Stainless Steel

DIMENSIONS

Profile

Profile with flat lens
Stainless steel mounting clip

END CAPS

ENDCAP QTY

CUT OFF

CL/60	CL/70

Clear 60° Clear 70°

LENS with LED visibility

CL	FR	PR	DF	ENC/CL	ENC/TL
Clear	Frosted	Polar	Diffused	Encapsulated in Clear	Encapsulated in Translucent

TYPE

SINGLE (Input only)

S1	S2	S3	S4

PASS THROUGH (Input/Output)

P1	P2	P3	P4

ORDER EXAMPLE

LENGTH (IN) : Add to nominal LED length for fixture length

S1	.08" + .08" + .25" = .41"
P1	.08" + .08" + 2(.25") = .66"

Endcap#1
Endcap#2
Space to solder wire

COMPATIBLE LEDs

STATIC WHITE (SW)				DYNAMIC WHITE (DW)				STATIC COLOR (SC)				RGB			RGBW				
DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

✓ = Compatible
✗ = NOT Compatible
✓ = NOT Compatible with 6.0 & 7.5 strips

PROJECT NAME	DATE	COMPANY	TYPE	NOTE