



# ZALA-SW FIXTURES - FLEXIBLE (Q-CAP)



PRODUCT	MOUNTING	RATED	CCT	OUTPUT	LENS	TYPE	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS (NO FEED)	LENGTH (IN)
<b>ZALA-SW</b>	<b>WSC</b> <b>RLC</b> <b>MC</b> <b>*SGC</b> <b>PPS-2</b> <b>PPS-96</b> <b>PPS-FT</b> <b>PPS-LP-2</b> <b>PPS-LP-96</b> <b>PPS-LP-FT</b>	<b>DRY</b> <b>WET</b>	<b>24</b> - 2400K <b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K	<b>SO</b> <b>HO</b> <b>VHO</b>	<b>ENC/CL</b> <b>ENC/TL</b>	Single (Closed exit) <b>S1</b> <b>S2</b> <b>S3</b> <b>S4</b> <b>2S5</b> <b>2S6</b>  Pass through <b>P1</b> <b>P2</b> <b>P3</b> <b>P4</b> <b>2P5</b> <b>2P6</b>	<b>1BW</b> <b>BRL</b>	<b>N/A</b>  <b>1BW</b> <b>BRL</b>	<b>CL</b> <b>WH</b>  <b>N/A</b>	1" increments from 1"-191" Tolerance +0.0"/-outpoint for installed product*


ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE

- NOTES:**
- Field modifications void warranty
  - Data subject to change, all data has +/- 5% tolerance
  - Dims with a forward or reverse phase dimmer with a neutral
  - Max ambient 105°F
- 1BW** comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)


### OUTPUT Tested for ZALA-SW-WSC-DRY [L70 = 40000 hrs]

CCT	S.O. Standard Output 1.5 W/ft				H.O. High Output 3.0 W/ft				V.H.O. Very High Output 5.0 W/ft			
	ENC/CL		ENC/TL		ENC/CL		ENC/TL		ENC/CL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	123	93	88	92	220	93	156	93	325	92	221	92
2700K	112	98	83	98	197	98	150	98	301	97	227	97
3000K	134	97	89	97	207	97	153	97	316	96	247	98
3500K	122	95	91	97	222	97	160	97	328	98	233	98
4000K	136	96	102	95	240	96	179	96	357	97	293	97


### LENS with LED visibility




### CONNECTOR/WIRE IN




### CONNECTOR/WIRE OUT



### MOUNTING NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

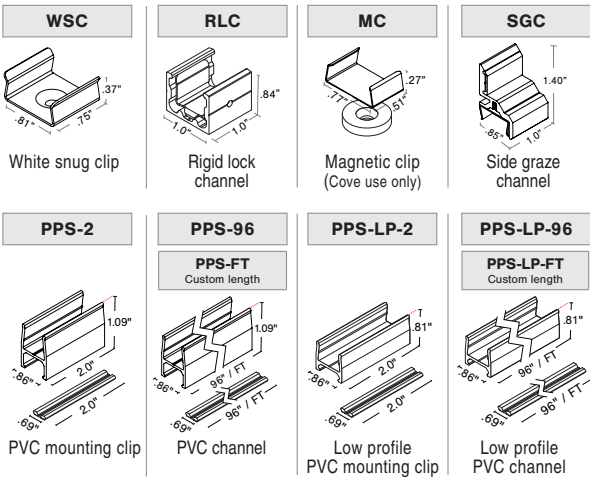


### DIMENSIONS

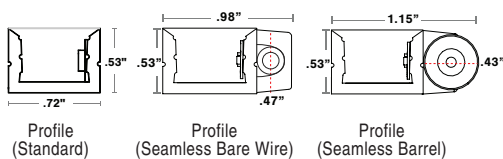


### TYPE


#### SINGLE (Input only)

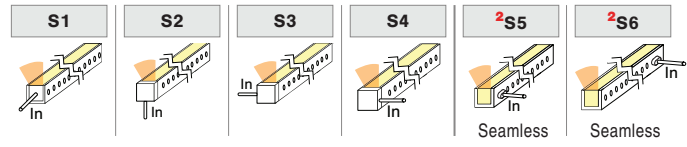


#### PASS THROUGH (Input/Output)

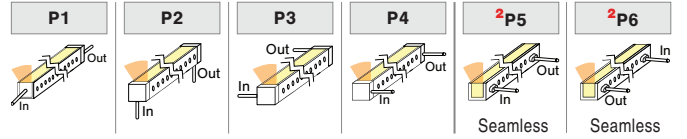


### FLEXIBILITY




### SEAMLESS



### END CAPS (NO FEED)



### END CAPS (WITH FEED)



PROJECT NAME	DATE	COMPANY	TYPE	NOTE