


RESOURCE GUIDE - MOUNTING FIXTURES - FLEXIBLE - WURM-DW



MOUNTING NOTE: 2 clips provided per first 12", 1 clip provided per additional 12"

WHITE SNUG CLIP SMALL

- For indoor/outdoor use
- Surface mounting
- Stainless Steel/Corrosion resistant
- Discrete mounting
- White glossy finish




MOUNTING HARDWARE

- #6 - 5/8" (one provided for each clip)
- 832 Silicone (sold separately)

MAGNETIC CLIP SMALL

- For indoor/outdoor use
- Steel clip
- Neodymium magnet
- Easy install
- Easily detachable
- COVE USE ONLY
- White glossy finish



MOUNTING HARDWARE

- #6 - 1 1/4" (one provided for each clip)
- 832 Silicone (sold separately)


RESOURCE GUIDE - LINEAR FIXTURES - FLEXIBLE - WURM-DW



RATED

DRY

- Lengths up to 191"
- Encapsulated in Polyurethane
- NOT FIELD CUTTABLE

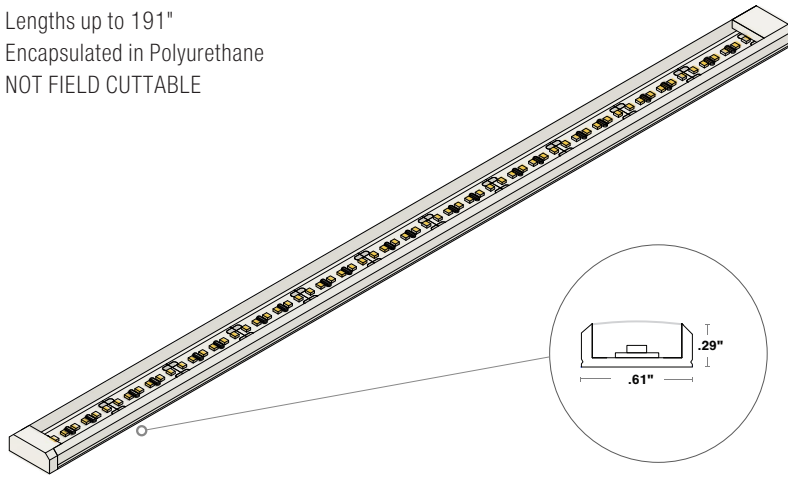

COMPATIBLE CONNECTORS


BW



BARE WIRE 24"

WET

- Lengths up to 191"
- Encapsulated in Polyurethane
- NOT FIELD CUTTABLE

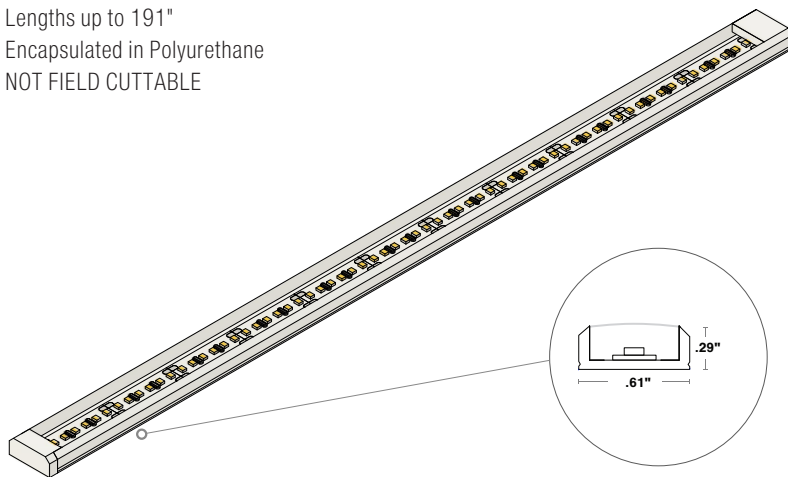

COMPATIBLE CONNECTORS

BW



BARE WIRE 24"

RESOURCE GUIDE - COLOR DATA




FIXTURES - FLEXIBLE - WURM-DW



2400K: ENC/CL

2381 K

CRI: 92.5
CRI R9: 64.1
TM30 Rf: 89.0
TM30 Rg: 102.7
CQS: 86.5
X: 0.487
Y: 0.414
U: 0.279
V: 0.355
Δuv: -0.0004





R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
93.5	95.2	94.1	93.5	92.3	94.4	92.9	83.8	64.1	86.8	94.2	83.0	93.9	95.3	89.8	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
83.6	92.8	85.1	86.3	87.0	83.5	81.8	86.4	94.0	89.0	89.3	89.6	90.2	85.5	84.4	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90.4	90.5	83.0	88.0	89.9	88.2	86.7	90.1	92.2	91.6	89.1	86.9	89.7	85.0	90.0	87.2

TM30			
Hue Bin	R _f	Chroma	Hue
1	90	-4%	-1%
2	91	-4%	3%
3	83	0%	8%
4	88	4%	6%
5	90	6%	5%
6	88	8%	0%
7	87	4%	-6%
8	90	1%	-6%
9	92	-2%	-3%
10	92	-4%	2%
11	89	-1%	7%
12	87	3%	4%
13	90	6%	-5%
14	85	5%	-8%
15	90	2%	-6%
16	87	-2%	-8%

3000K: ENC/CL

3133 K

CRI: 95.9
CRI R9: 90.9
TM30 Rf: 92.0
TM30 Rg: 102.5
CQS: 92.2
X: 0.426
Y: 0.395
U: 0.247
V: 0.344
Δuv: -0.0018





R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
97.6	96.6	93.1	96.2	96.2	93.9	97.3	96.7	90.9	90.0	95.3	78.4	97.3	95.2	97.8	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
96.3	97.7	85.7	87.1	92.2	92.2	89.4	93.7	95.4	92.5	92.8	94.1	95.8	95.9	95.9	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
95.7	95.9	90.5	92.4	92.3	93.3	94.1	96.1	94.9	87.6	84.5	88.5	94.3	90.8	92.5	87.8

TM30			
Hue Bin	R _f	Chroma	Hue
1	96	-1%	-1%
2	96	-1%	1%
3	91	0%	4%
4	92	0%	3%
5	92	0%	3%
6	93	4%	0%
7	94	0%	-1%
8	96	0%	-2%
9	95	-2%	2%
10	88	-2%	6%
11	85	1%	10%
12	89	5%	5%
13	94	4%	1%
14	91	7%	-2%
15	92	2%	-3%
16	88	3%	-9%

2400K: ENC/TL

2318 K

CRI: 91.7
CRI R9: 62.3
TM30 Rf: 87.7
TM30 Rg: 103.3
CQS: 84.6
X: 0.493
Y: 0.413
U: 0.283
V: 0.356
Δuv: -0.0007



R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
92.6	94.7	94.0	92.4	91.2	93.6	92.4	82.7	62.3	85.6	92.7	81.0	93.0	95.1	89.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
81.9	91.8	83.1	84.2	85.2	81.1	78.5	83.7	93.1	87.4	87.4	87.5	88.4	84.4	82.9	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.7	89.3	80.4	86.5	88.7	86.7	84.8	88.4	91.3	90.2	87.5	86.0	89.0	84.0	89.0	86.5

TM30			
Hue Bin	R _f	Chroma	Hue
1	90	-4%	-1%
2	89	-4%	4%
3	80	0%	9%
4	86	4%	7%
5	89	7%	6%
6	87	9%	0%
7	85	4%	-8%
8	88	0%	-7%
9	91	-3%	-3%
10	90	-4%	3%
11	88	0%	7%
12	86	3%	6%
13	89	6%	-5%
14	84	6%	-8%
15	89	2%	-7%
16	86	-2%	-9%

- NOTES:**
- CRI R values, only R1-R8 are used to calculate RA CRI values
 - TM30 C values, 16 binned values out of total of 99 C values
 - CQS Q values
 - Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - COLOR DATA




FIXTURES - FLEXIBLE - WURM-DW



3000K: ENC/TL

2999 K

CRI: 95.8
CRI R9: 89.4
TM30 Rf: 92.3
TM30 Rg: 102.1
CQS: 92.4
X: 0.436
Y: 0.401
U: 0.251
V: 0.347
Δuv: -0.0010



R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
97.2	96.5	93.3	96.2	95.7	94.0	97.5	96.1	89.4	89.8	95.5	79.2	96.9	95.3	97.1	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
95.8	97.7	86.6	87.8	92.2	92.0	89.6	93.6	95.6	92.9	93.1	94.4	95.8	95.5	95.3	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C16	
95.5	95.8	90.9	93.3	92.3	93.9	94.3	96.3	95.2	89.0	85.8	88.1	94.6	91.2	92.8	88.4

TM30			
Hue Bin	R _f	Chroma	Hue
1	96	-2%	-1%
2	96	-1%	1%
3	91	0%	4%
4	93	0%	3%
5	92	0%	3%
6	94	3%	0%
7	94	0%	-1%
8	96	-1%	-2%
9	95	-2%	1%
10	89	-2%	6%
11	86	1%	10%
12	88	4%	5%
13	95	3%	0%
14	91	6%	-2%
15	93	2%	-3%
16	88	3%	-8%

NOTES:

- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - FLEXIBLE FIXTURES

FIXTURES - FLEXIBLE - WURM-DW




LENS



ENC/CL Encapsulated in Clear

ENC/TL Encapsulated in Translucent

LIGHT ORIENTATION




CONNECTORS

BW




BARE WIRE 24"

TYPE



S1 - Input only



P1 - Input/Output



RESOURCE GUIDE - CONNECTORS/WIRE FIXTURES - FLEXIBLE - WURM-DW



CONNECTORS/WIRE

BARE WIRE

- Belden Wire 22 AWG
- Outdoor rated
- 24" Standard length

BW



BARE WIRE