


RESOURCE GUIDE - MOUNTING FIXTURES - FLEXIBLE - WURM-RGB



MOUNTING NOTE: 2 clips provided per first 12", 1 clip provided per additional 12"

WHITE SNUG CLIP SMALL

- For indoor/outdoor use
- Surface mounting
- Stainless Steel/Corrosion resistant
- Discrete mounting
- White glossy finish




MOUNTING HARDWARE

- #6 - 5/8" (one provided for each clip)
- 832 Silicone (sold separately)

MAGNETIC CLIP SMALL

- For indoor/outdoor use
- Steel clip
- Neodymium magnet
- Easy install
- Easily detachable
- COVE USE ONLY
- White glossy finish



MOUNTING HARDWARE

- #6 - 1 1/4" (one provided for each clip)
- 832 Silicone (sold separately)


RESOURCE GUIDE - LINEAR FIXTURES - FLEXIBLE - WURM-RGB



RATED

DRY

- Lengths up to 191"
- Encapsulated in Polyurethane
- NOT FIELD CUTTABLE

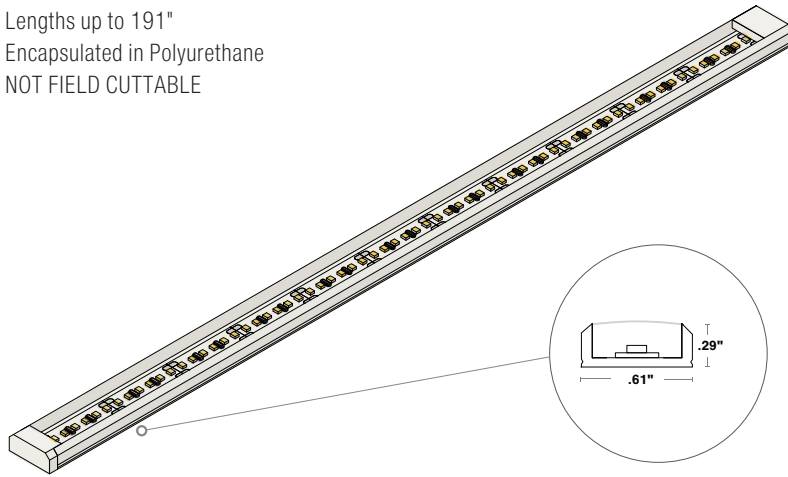

COMPATIBLE CONNECTORS


BW



BARE WIRE 24"

WET

- Lengths up to 191"
- Encapsulated in Polyurethane
- NOT FIELD CUTTABLE

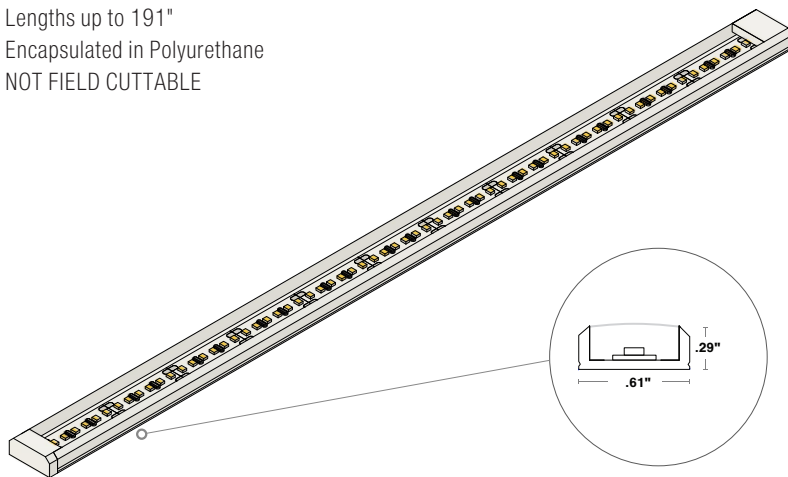

COMPATIBLE CONNECTORS

BW



BARE WIRE 24"

RESOURCE GUIDE - COLOR DATA




FIXTURES - FLEXIBLE - WURM-RGB



ALL: ENC/CL

8637 K

CRI: 49.9
 CRI R9: -164.0
 TM30 Rf: 48.0
 TM30 Rg: 94.6
 CQS: 47.1
 X: 0.275
 Y: 0.336
 U: 0.170
 V: 0.311
 Δuv: 0.0234





R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
40.3	64.8	70.9	55.2	58.9	55.2	51.3	2.3	-164.0	15.0	49.7	66.9	43.8	80.9	24.1	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
50.7	58.6	53.7	50.1	76.7	85.8	72.8	64.6	53.2	30.1	13.2	12.7	32.4	75.2	57.4	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
32.1	31.8	15.5	35.0	31.2	65.7	77.5	57.5	67.1	68.2	49.6	54.8	62.7	39.5	49.9	49.5

TM30			
Hue Bin	R _f	Chroma	Hue
1	32	33%	6%
2	32	27%	-22%
3	16	10%	-45%
4	35	-14%	-37%
5	31	-35%	-20%
6	66	-15%	12%
7	77	2%	6%
8	58	6%	20%
9	67	18%	9%
10	68	9%	-9%
11	50	2%	-18%
12	55	-15%	-20%
13	63	-18%	3%
14	39	-16%	31%
15	50	14%	36%
16	49	14%	19%

RED: ENC/CL

0 K

CRI: 0.0
 CRI R9: 0.0
 TM30 Rf: 0.0
 TM30 Rg: 0.0
 CQS: 0.0
 X: 0.665
 Y: 0.300
 U: 0.505
 V: 0.342
 Δuv: n/a






R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R _f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

GREEN: ENC/CL

0 K

CRI: 0.0
 CRI R9: 0.0
 TM30 Rf: 0.0
 TM30 Rg: 0.0
 CQS: 0.0
 X: 0.158
 Y: 0.693
 U: 0.058
 V: 0.378
 Δuv: n/a



R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R _f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

NOTES:

- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - COLOR DATA




FIXTURES - FLEXIBLE - WURM-RGB



BLUE: ENC/CL



CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.140
Y: 0.088
U: 0.148
V: 0.140
 Δuv : n/a



R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R _f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

NOTES:

- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - FLEXIBLE FIXTURES

FIXTURES - FLEXIBLE - WURM-RGB




LENS NOTE: Indirect view recommended



ENC/CL Encapsulated in Clear

LIGHT ORIENTATION




CONNECTORS

BW




BARE WIRE 24"

TYPE



S1 - Input only



P1 - Input/Output



RESOURCE GUIDE - CONNECTORS/WIRE FIXTURES - FLEXIBLE - WURM-RGB



CONNECTORS/WIRE

BARE WIRE

- Belden Wire 22 AWG
- Outdoor rated
- 24" Standard length

BW



BARE WIRE