


RESOURCE GUIDE - MOUNTING FIXTURES - FLEXIBLE - WURM-RGBW



MOUNTING NOTE: 2 clips provided per first 12", 1 clip provided per additional 12"

WHITE SNUG CLIP SMALL

- For indoor/outdoor use
- Surface mounting
- Stainless Steel/Corrosion resistant
- Discrete mounting
- White glossy finish




MOUNTING HARDWARE

- #6 - 5/8" (one provided for each clip)
- 832 Silicone (sold separately)

MAGNETIC CLIP SMALL

- For indoor/outdoor use
- Steel clip
- Neodymium magnet
- Easy install
- Easily detachable
- COVE USE ONLY
- White glossy finish



MOUNTING HARDWARE

- #6 - 1 1/4" (one provided for each clip)
- 832 Silicone (sold separately)


RESOURCE GUIDE - LINEAR FIXTURES - FLEXIBLE - WURM-RGBW



RATED


DRY

- Lengths up to 191"
- Encapsulated in Polyurethane
- NOT FIELD CUTTABLE

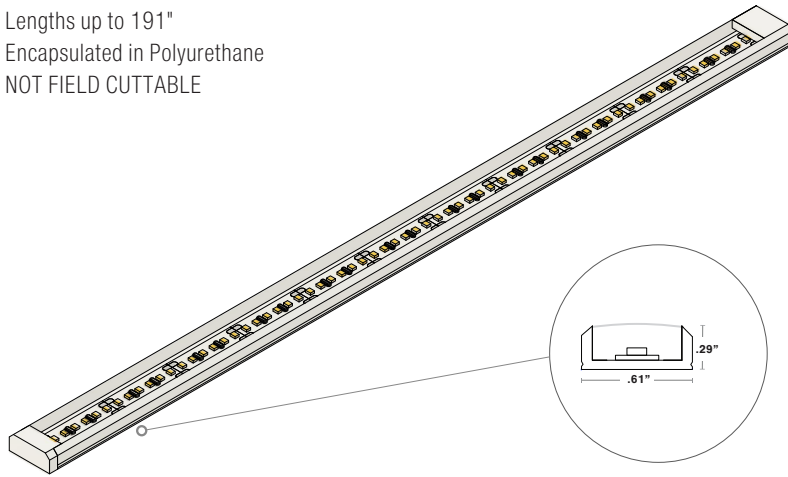

COMPATIBLE CONNECTORS


BW



BARE WIRE 24°


WET

- Lengths up to 191"
- Encapsulated in Polyurethane
- NOT FIELD CUTTABLE

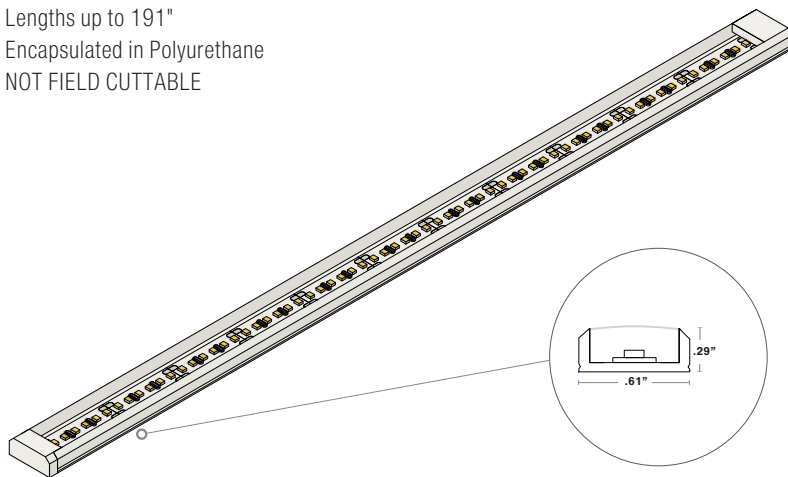

COMPATIBLE CONNECTORS

BW



BARE WIRE 24°

RESOURCE GUIDE - COLOR DATA




FIXTURES - FLEXIBLE - WURM-RGBW



RED



CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.613
Y: 0.291
U: 0.466
V: 0.331
Δuv: n/a






R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R _f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

GREEN



CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.145
Y: 0.654
U: 0.055
V: 0.372
Δuv: n/a






R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R _f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

BLUE



CRI: 0.0
CRI R9: 0.0
TM30 Rf: 0.0
TM30 Rg: 0.0
CQS: 0.0
X: 0.140
Y: 0.067
U: 0.159
V: 0.115
Δuv: n/a



R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30			
Hue Bin	R _f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

- NOTES:**
- CRI R values, only R1-R8 are used to calculate RA CRI values
 - TM30 C values, 16 binned values out of total of 99 C values
 - CQS Q values
 - Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - COLOR DATA




FIXTURES - FLEXIBLE - WURM-RGBW



2700K

2785 K

CRI: 93.3
CRI R9: 73.2
TM30 Rf: 86.4
TM30 Rg: 105.4
CQS: 86.0
X: 0.440
Y: 0.385
U: 0.261
V: 0.343
 Δuv : -0.0082



R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
96.0	96.8	94.3	92.0	94.7	94.4	91.5	87.0	73.2	90.1	91.4	82.7	96.5	95.6	95.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
87.6	96.7	79.7	81.9	88.4	85.2	78.8	85.5	95.7	86.9	85.4	85.6	87.8	89.8	89.1	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91.7	89.3	78.3	83.7	86.3	83.5	84.8	88.0	93.1	88.2	81.4	82.7	89.1	86.2	88.4	84.7

TM30			
Hue Bin	Ri	Chroma	Hue
1	92	-4%	-1%
2	89	-3%	5%
3	78	1%	10%
4	84	5%	8%
5	86	9%	6%
6	83	10%	-2%
7	85	5%	-7%
8	88	1%	-7%
9	93	-2%	-2%
10	88	-4%	5%
11	81	-1%	12%
12	83	6%	7%
13	89	7%	0%
14	86	9%	-5%
15	88	3%	-5%
16	85	1%	-11%

NOTES:

- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - FLEXIBLE FIXTURES

FIXTURES - FLEXIBLE - WURM-RGBW




LENS NOTE: Indirect view recommended



ENC/CL Encapsulated in Clear

LIGHT ORIENTATION




CONNECTORS

BW




BARE WIRE 24"

TYPE



S1 - Input only



P1 - Input/Output



RESOURCE GUIDE - CONNECTORS/WIRE FIXTURES - FLEXIBLE - WURM-RGBW



CONNECTORS/WIRE

BARE WIRE

- Belden Wire
- Outdoor rated
- 24" Standard length

BW



BARE WIRE