

KURV-SC FIXTURES - FLEXIBLE (Q-CAP)



PRODUCT	MOUNTING	RATED	CCT	OUTPUT	LENS	TYPE	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS (NO FEED)	LENGTH (IN)
KURV-SC Voltage: 24 VDC Wattage: 5.0 W/ft *White snug clip included with side graze channel	WSC RLC MC *SGC PPS-2 PPS-96 PPS-FT PPS-LP-2 PPS-LP-96 PPS-LP-FT	DRY WET	G - Green B - Blue R - Red (FWC) A - Amber (FWC)	VHO VHO	ENC/CL ENC/TL	S1 S2 S3 S4 2S5 2S6 P1 P2 P3 P4 2P5 2P6	1BW BRL	N/A	CL WH	2" increments from 2"-191"

ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE


- NOTES:**
- Field modifications are not covered under Q-Tran warranty
 - Data subject to change, all data has +/- 5% tolerance
 - FWC Flexible Fixtures are Florida Fish and Wildlife Conservation Commission rated
 - PPS-FT is to be cut at Q-Tran at requested foot length

- 1BW comes in standard 24" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with White Endcap (WH)
- 2 PPS mounting clip recommended for seamless applications


OUTPUT Tested for KURV-SC-WSC-DRY (L70 = 40000 hrs)

CCT	VHO Very High Output			
	ENC/CL		ENC/TL	
	lm/ft	Wavelength	lm/ft	Wavelength
Red	92.3	632	87.4	633
Green	432	520	366	519
Blue	97.7	466	88.4	468
Amber	87.9	595	74.1	594


LENS with LED visibility




CONNECTOR/WIRE IN




CONNECTOR/WIRE OUT




MOUNTING NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

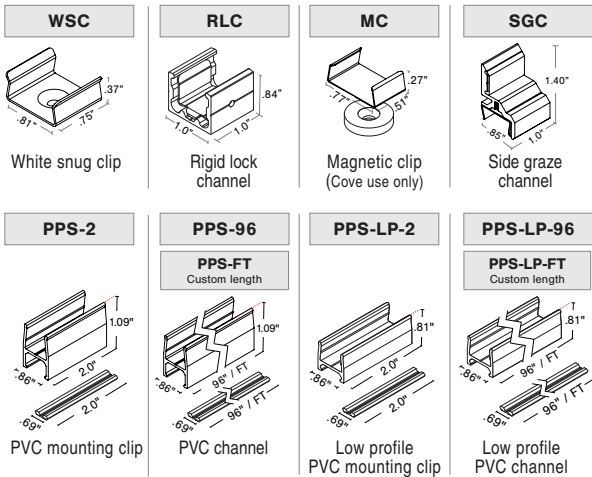


TYPE

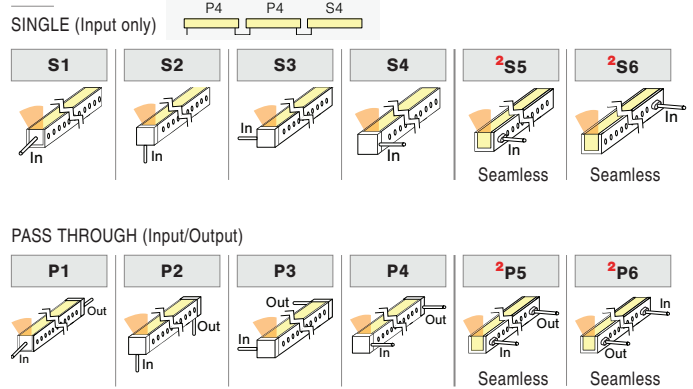


DIMENSIONS

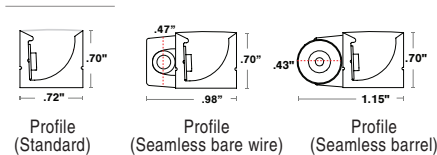


VIEWING ANGLE




FLEXIBILITY




SEAMLESS



END CAPS (NO FEED)



END CAPS (WITH FEED)



PROJECT NAME	DATE	COMPANY	TYPE	NOTE