



ZALA-SC FIXTURES - FLEXIBLE (Q-CAP)



PRODUCT	MOUNTING	RATED	CCT	OUTPUT	LENS	TYPE	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS (NO FEED)	LENGTH (IN)
ZALA-SC	WSC RLC MC *SGC PPS-2 PPS-96 PPS-FT PPS-LP-2 PPS-LP-96 PPS-LP-FT	DRY WET	G - Green B - Blue R - Red (FWC) A - Amber (FWC)	VHO VHO	ENC/CL ENC/TL	S1 S2 S3 S4 2S5 2S6 P1 P2 P3 P4 2P5 2P6	1BW BRL	N/A	CL WH N/A	2" increments from 2'-191" Tolerance +0.0"/-outpoint for installed product*


ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE

- NOTES:**
- Field modifications are not covered under Q-Tran warranty
 - Data subject to change, all data has +/- 5% tolerance
 - FWC Flexible Fixtures are Florida Fish and Wildlife Conservation Commission rated
 - PPS-FT is to be cut at Q-Tran at requested foot length
 - 1BW comes in standard 24" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
 - Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with White Endcap (WH)
 - 2 PPS mounting clip recommended for seamless applications


OUTPUT Tested for ZALA-SC-WSC-DRY [L70 = 40000 hrs]

VHO Very High Output				
CCT	ENC/CL		ENC/TL	
	lm/ft	Wavelength	lm/ft	Wavelength
Red	101	633	75	633
Green	439	519	302	520
Blue	109	468	66.6	467
Amber	94	594	66.1	594


LENS with LED visibility




CONNECTOR/WIRE IN




CONNECTOR/WIRE OUT



MOUNTING NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

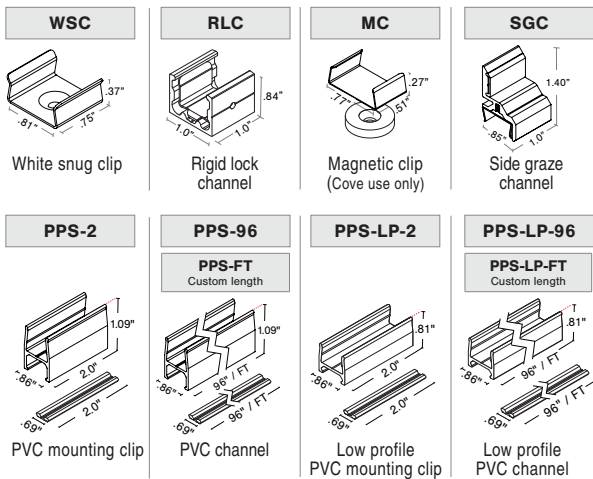


DIMENSIONS

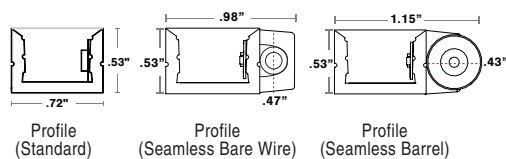


TYPE


SINGLE (Input only)

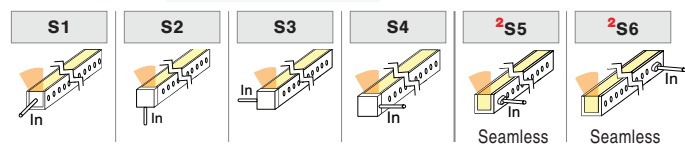


PASS THROUGH (Input/Output)

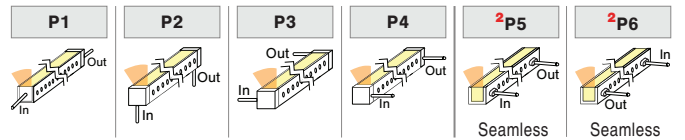


FLEXIBILITY




SEAMLESS



END CAPS (NO FEED)



END CAPS (WITH FEED)



PROJECT NAME	DATE	COMPANY	TYPE	NOTE