

# MOUNTING INSTALLATION

## EXTRUSIONS - SURFACE - TRE3

Model: iQA




**MOUNTING** NOTE: 2 clips provided for 4' or less;  
4 clips provided for greater than 4'



TRE3-HSS  
Hidden Stainless Steel


### WIRE WAY

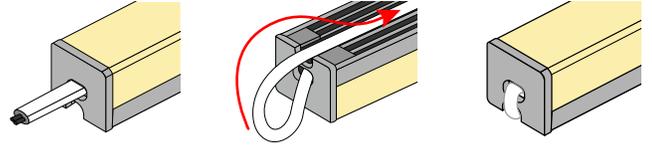


To utilize the TRE 3's wire way, pull the wire and snap the TRE3 onto the HSS-TRE3 Clip to hold the wire down

**NOTE:** Wireway only works with our outdoor WET RATED wire

### Screw Mounting

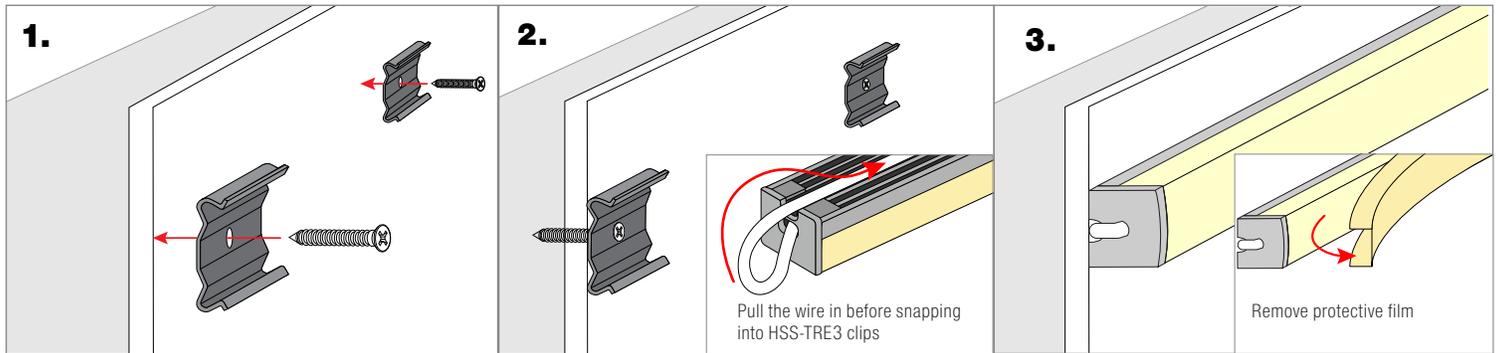

### 832 Silicone Mounting

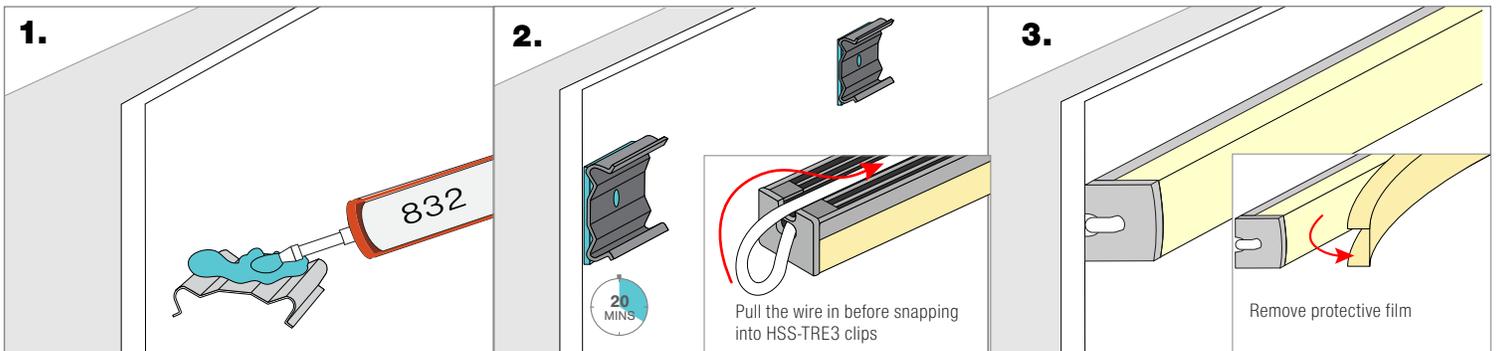

**NOTE:** 832 Silicone use in a well-ventilated area, 832 Silicone sold with Caulking gun. Do not use in any submersible applications.

**NOTES:** • Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void


# MOUNTING INSTALLATION

## EXTRUSIONS - SURFACE - TRE3

Model: iQA




**MOUNTING** NOTE: Standard 1"(15/16) grid Clips  
: 2 clips provided per first 12",  
1 clip provided per additional foot



TRE3-TBC  
Plastic T-Bar


### WIRE WAY

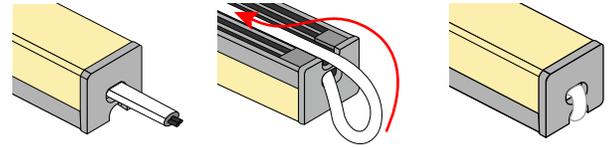

To utilize the TRE 3's wire way, pull the wire and insert the TBC-TRE3 clip onto the bottom track to hold the wire down

**NOTE:** Wireway only works with our outdoor WET RATED wire

### Mounting Clip

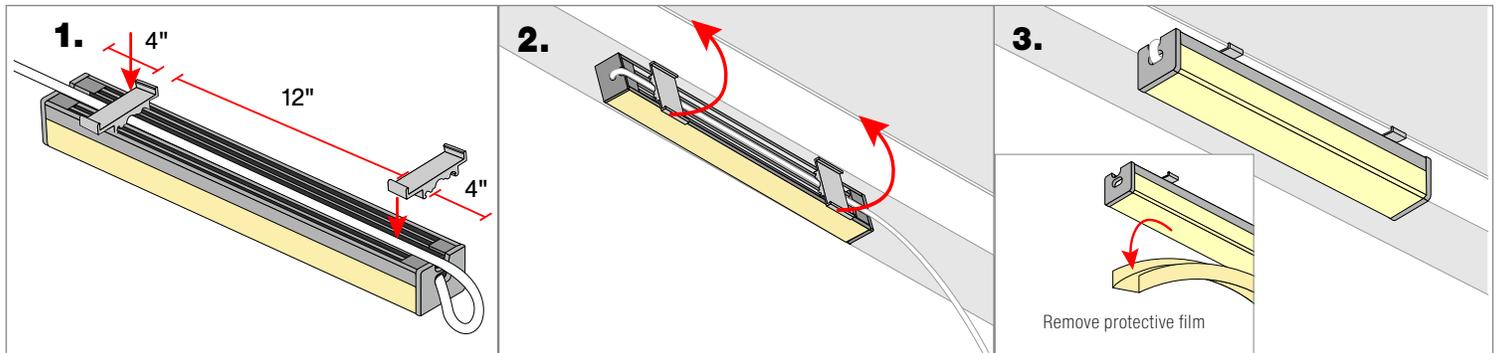

Clip on the T-BAR clips 4" inward from each end, and then 12" apart for the full length

**NOTES:** • Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void