




MDIN-S

EXTRUSIONS - ALUMINUM

Model: iQA

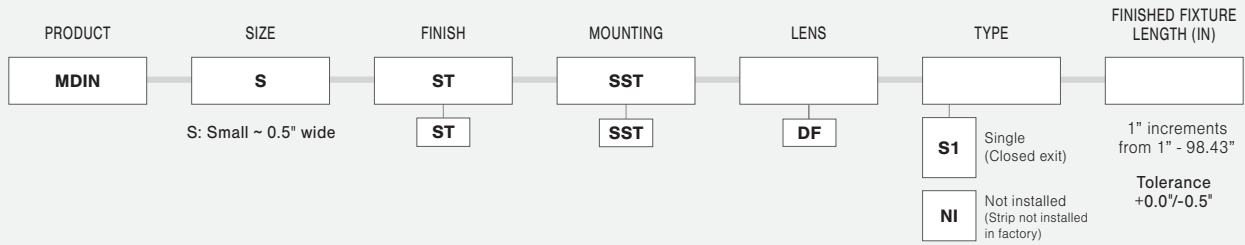

- NOTES:**
- UL Listed when assembled with STRIP LEDs at Q-Tran
 - NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, with 4.0 w/ft or less, at Q-Tran facility (Not applicable for encapsulation)
 - Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void
 - Recess mounted with adhesive only

FINISH




MOUNTING


NOTE: 2 clips provided for 4' or less;
4 clips provided for greater than 4'



Stainless Steel




LENS




Diffused



DIMENSIONS





Profile





Profile with
Stainless Steel Mounting Clip

TYPE


SINGLE (Input only)



END CAPS



ORDER EXAMPLE



LENGTH (IN) : Add to nominal LED length for fixture length



$$\text{S1 } .08'' + .08'' + .25'' = .41''$$

Endcap#1 Endcap#2
Space to solder wire

COMPATIBLE LEDs

STATIC WHITE (SW)				DYNAMIC WHITE (DW)				STATIC COLOR (SC)				RGB				RGBW			
DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC	DRY	DMP	WET	ENC
●	◆	×	×	✓	✓	×	×	✓	✓	×	×	✓	✓	×	×	✓	✓	×	×

✓ = Compatible ◆ = NOT Compatible with 6.0 & 7.5 strip ● = NOT Compatible with 7.5 strip
 × = NOT Compatible

PROJECT NAME	DATE	COMPANY	TYPE	NOTE