



# SW120/4.0

## Line Voltage Static White



PRODUCT	MOUNTING	RATED	CCT-LUMENS/CRI	LENS	TYPE	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	LENGTH (IN)
<b>SW120/4.0</b> Voltage: <b>120VAC</b> Wattage: <b>4.0 W/ft</b>	<b>PL</b> <b>PPS-96</b> <b>PPS-FT</b>	<b>WET</b>	<b>24</b> - 2400K 275 / 97 <b>27</b> - 2700K 307 / 97 <b>30</b> - 3000K 320 / 97 <b>35</b> - 3500K 330 / 97 <b>40</b> - 4000K 336 / 97	<b>CL</b> <b>CL</b>	Single (Closed exit) <b>S1</b> Pass through <b>P1</b>	<b>1BW</b> <b>1BW</b>	<b>SE</b> <b>1BW</b>	4" increments <b>Max nominal length 100'</b>

THIS PRODUCT IS **NOT** FIELD CUTTABLE

- NOTES:**
- Field modifications void warranty
  - Data subject to change, all data has +/- 5% tolerance
  - Dims with a forward or reverse phase dimmer with a neutral
  - Max ambient 105°F
- 1BW** comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)



### OUTPUT

Tested for SW120/4.0-WET [L70 = 30000 HRS]


4.0 W/ft Standard Output					
CCT	Lumen/ft	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2400K	275	97	76	94	103
2700K	307	97	85	95	102
3000K	320	97	88	94	102
3500K	330	97	98	93	103
4000K	336	97	95	92	100

### LENS

with LED visibility




### DIMENSIONS

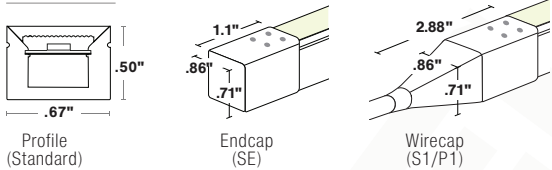


### TYPE


SINGLE (Input only)




### ENDCAP




### MOUNTING CLIP




### FLEXIBILITY




PASS THROUGH (Input/Output)




### MOUNTING CHANNEL



### CONNECTOR/WIRE IN



### CONNECTOR/WIRE OUT



PROJECT NAME	DATE	COMPANY	TYPE	NOTE