

# VERS-PROUD (01)

## FIXTURES - LINEAR



The VERS Proud is a finished aluminum fixture utilizing an extruded lens that sits proud of the fixture for maximum variations of LED sources. The high quality, proud lens provides a delicate glow at the edges of the fixture, creating a slim line of light. Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look suitable for dry, damp and wet locations.

### Static White



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-SW</b>												
Voltage: 24VDC												
	1.5 3.0 4.0 5.0 6.0 7.5	20 22 24 27 30 35 40	<b>DRY</b> IP20	<b>FR</b> <b>PR</b> <b>DF</b>	Single (Closed exit) S1 S2	<sup>1</sup> BW CON6 CON24	CLS	WH BK	CL2 <sup>2</sup> CL2P	CC MG	ST BK BZ	
	1.5 3.0 4.0 5.0	24 27 30 35 40	<b>DMP</b> IP54		Pass through P1 P2	<sup>1</sup> BW CON6 CON24	<sup>1</sup> BW CON6 CON24	WH BK	CL2 <sup>2</sup> CL2P			
	1.5 3.0 4.0 5.0	20 22 24 27 30 35 40	<b>WET</b> IP67									

\*Available in 1" (or 2") increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

### High Efficacy



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-SW</b>			<b>DRY</b>									
Voltage: 24VDC												
	6.0HE 9.0HE	27 30 35 40	<b>DRY</b> IP20	<b>FR</b> <b>PR</b> <b>DF</b>	Single (Closed exit) S1 S2	<sup>1</sup> BW CON6 CON24	CLS	WH BK	CL2 <sup>2</sup> CL2P	CC MG	ST BK BZ	
					Pass through P1 P2	<sup>1</sup> BW CON6 CON24	<sup>1</sup> BW CON6 CON24	WH BK	CL2 <sup>2</sup> CL2P			


\*Available in 2" increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

### Dynamic White

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-DW</b>												
Voltage: 24VDC												
	6.0	20/27 20/30	<b>DRY</b> IP20	<b>FR</b> <b>PR</b> <b>DF</b>	Single (Closed exit) S1 S2	<sup>1</sup> BW CON6 CON24	CLS	WH BK	CL2 <sup>2</sup> CL2P	CC MG	ST BK BZ	
	6.0	24/30	<b>DMP</b> IP54		Pass through P1 P2	<sup>1</sup> BW CON6 CON24	<sup>1</sup> BW CON6 CON24	WH BK	CL2 <sup>2</sup> CL2P			
		20/27 20/30	<b>WET</b> IP67									

\*Available in 2" increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

- NOTES:**
- Field modifications void warranty
  - Data subject to change, all data has +/- 5% tolerance
  - Contact Q-Tran for compatible power supplies
  - <sup>1</sup> BW comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
  - Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
  - <sup>2</sup> Specify CL2P for plenum rated wire
  - <sup>3</sup> Based on SW/ft



# VERS-PROUD (01)

## FIXTURES - LINEAR



### TECHNICAL INFORMATION [CALCULATED L70 (6K) = 70000 HRS]

#### STATIC WHITE

Tested with VERS-01-SW-\*\*-30-DRY-\*\*

	1.5W/FT		3.0W/FT		4.0W/FT		5.0W/FT		6.0W/FT		7.5W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	147	98	258	98	326	98	387	98	486	98	518	98
PR	142	98	251	98	315	98	374	98	467	98	498	98
DF	125	98	220	98	276	98	329	98	411	98	436	98

#### DYNAMIC WHITE

Tested with VERS-01-DW-6.0-\*\*-DRY-\*\*


	2000K		2700K		3000K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	206	94	221	97	238	98
PR	200	94	212	97	227	98
DF	175	94	186	97	199	98

#### HIGH EFFICACY

Tested with VERS-01-SW-\*\*-30-DRY-\*\*


	6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI
FR	645	98	973	98
PR	629	98	931	98
DF	555	98	826	98

#### LENS with LED visibility





#### INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




#### CONNECTOR/WIRE IN/WIRE OUT



**MOUNTING** NOTE: 2 pieces of hardware provided for 4' or less;  
4 pieces of hardware provided for greater than 4'

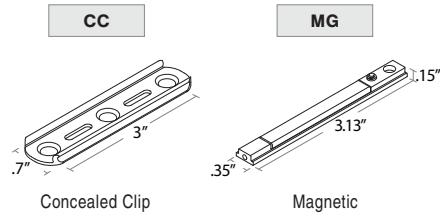


#### FINISH




#### FIXTURE DIMENSION DETAILS


##### DIMENSIONS



##### END CAPS

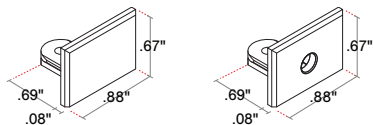

**LED LENGTH (IN)** : Add to nominal LED length for fixture length

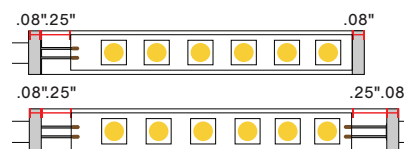

$$\begin{aligned} &\text{Endcap\#1} \\ &\text{Endcap\#2} \\ &\text{Space to solder wire} \\ \text{S1 } &.08" + .08" + .25" = .41" \\ \text{P1 } &.08" + .08" + 2(.25") = .66" \end{aligned}$$