

# VERS-PROUD (01)

## FIXTURES - LINEAR



The VERS Proud is a finished aluminum fixture utilizing an extruded lens that sits proud of the fixture for maximum variations of LED sources. The high quality, proud lens provides a delicate glow at the edges of the fixture, creating a slim line of light. Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look suitable for dry, damp and wet locations.

### Static White



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-SW</b>												
Voltage: 24VDC												
	1.5 3.0 4.0 5.0 6.0 7.5	20 22 24 27 30 35 40	<b>DRY</b> IP20	<b>FR</b> <b>PR</b> <b>DF</b>	Single (Closed exit) S1 S2	<sup>1</sup> BW CON6 CON24	CLS	WH BK	CL2 <sup>2</sup> CL2P	CC MG	ST BK BZ WH	
	1.5 3.0 4.0 5.0	24 27 30 35 40	<b>DMP</b> IP54		Pass through P1 P2	<sup>1</sup> BW CON6 CON24	<sup>1</sup> BW CON6 CON24	WH BK	CL2 <sup>2</sup> CL2P			
	1.5 3.0 4.0 5.0	20 22 24 27 30 35 40	<b>WET</b> IP67									

\*Available in 1" increments for 1.5W/ft - 5.0W/ft and 2" increments for 6.0W/ft - 7.5W/ft. Maximum length of 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

### High Efficacy



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-SW</b>			<b>DRY</b>									
Voltage: 24VDC												
	1.5HE 3.0HE 6.0HE 9.0HE	20 22 24 27 30 35 40	<b>DRY</b> IP20	<b>FR</b> <b>PR</b> <b>DF</b>	Single (Closed exit) S1 S2	<sup>1</sup> BW CON6 CON24	CLS	WH BK	CL2 <sup>2</sup> CL2P	CC MG	ST BK BZ WH	
					Pass through P1 P2	<sup>1</sup> BW CON6 CON24	<sup>1</sup> BW CON6 CON24	WH BK	CL2 <sup>2</sup> CL2P			


\*Available in 2" increments to 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

### Dynamic White

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-DW</b>	6.0											
Voltage: 24VDC												
	6.0	20/27 20/30	<b>DRY</b> IP20	<b>FR</b> <b>PR</b> <b>DF</b>	Single (Closed exit) S1 S2	<sup>1</sup> BW CON6 CON24	CLS	WH BK	CL2 <sup>2</sup> CL2P	CC MG	ST BK BZ WH	
		24/30	<b>DMP</b> IP54		Pass through P1 P2	<sup>1</sup> BW CON6 CON24	<sup>1</sup> BW CON6 CON24	WH BK	CL2 <sup>2</sup> CL2P			
		20/27 20/30	<b>WET</b> IP67									

\*Available in 2" increments to 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

- NOTES:**
- Field modifications void warranty
  - Data subject to change, all data has +/- 5% tolerance
  - Contact Q-Tran for compatible power supplies
  - NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, at Q-Tran facility (Not applicable for encapsulation)
  - <sup>1</sup> BW comes in standard 36" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
  - Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
  - <sup>2</sup> Specify CL2P for plenum rated wire
  - <sup>3</sup> Based on 5W/ft



# VERS-PROUD (01)

## FIXTURES - LINEAR



The VERS Proud is a finished aluminum fixture utilizing an extruded lens that sits proud of the fixture for maximum variations of LED sources. The high quality, proud lens provides a delicate glow at the edges of the fixture, creating a slim line of light. Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look suitable for dry, damp and wet locations.

### Static Color

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-SC</b>	5.0											
Voltage: 24VDC												
	5.0	GR BL RD AB	DRY IP20  DMP IP54  WET IP67	FR PR DF	Single (Closed exit)  Pass through	S1 S2  P1 P2	<sup>1</sup> BW CON6 CON24  <sup>1</sup> BW CON6 CON24	CLS  <sup>1</sup> BW CON6 CON24	WH BK  WH BK	CL2 CL2P  CL2 CL2P	CC MG	ST BK BZ WH

\*Available in 2" increments to 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

### RGB

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-RGB</b>	6.0	RGB										
Voltage: 24VDC												
	6.0	RGB	DRY IP20  DMP IP54  WET IP67	FR PR DF	Single (Closed exit)  Pass through	S1 S2  P1 P2	<sup>1</sup> BW CON6 CON24  <sup>1</sup> BW CON6 CON24	CLS  <sup>1</sup> BW CON6 CON24	WH BK  WH BK	CL2 CL2P  CL2 CL2P	CC MG	ST BK BZ WH


\*Available in 2" increments to 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

### RGBW

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-01-RGBW</b>	6.0											
Voltage: 24VDC												
	6.0	RGBW-27 RGBW-30	DRY IP20  DMP IP54	FR PR DF	Single (Closed exit)  Pass through	S1 S2  P1 P2	<sup>1</sup> BW CON6 CON24  <sup>1</sup> BW CON6 CON24	CLS  <sup>1</sup> BW CON6 CON24	WH BK  WH BK	CL2 CL2P  CL2 CL2P	CC MG	ST BK BZ WH

\*Available in 4" increments to 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

- NOTES:**
- Field modifications void warranty
  - Data subject to change, all data has +/- 5% tolerance
  - Contact Q-Tran for compatible power supplies
  - <sup>1</sup>BW comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
  - Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
  - <sup>2</sup> Specify CL2P for plenum rated wire



# VERS-PROUD (01)

## FIXTURES - LINEAR



### TECHNICAL INFORMATION

**STATIC WHITE** [Calculated L70 (6k) = 70000 hrs]  
Tested with VERS-01-SW-\*\*-30-DRY-\*\*

	1.5W/FT		3.0W/FT		4.0W/FT		5.0W/FT		6.0W/FT		7.5W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	156	98	270	98	348	98	423	98	493	98	552	98
PR	152	98	261	98	338	98	409	98	475	98	537	98
DF	138	97	240	98	310	98	370	98	432	98	487	98

**STATIC COLOR** [Calculated L70 (6k) = 30000 hrs]  
Tested with VERS-01-SC-5.0-\*\*-DRY-\*\*

	Red		Green		Blue		Amber	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
FR	116	634	554	519	127	467	86	595
PR	111	634	546	519	123	467	80	596
DF	105	634	490	519	114	467	73	596

**DYNAMIC WHITE**  
[Calculated L70 (6k) = 70000 hrs]  
Tested with VERS-01-DW-6.0-\*\*-DRY-\*\*

	2000K		2700K		3000K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	216	94	238	97	251	98
PR	211	94	231	97	244	98
DF	190	94	209	97	217	98

**HIGH EFFICACY** [Calculated L70 (6k) = 70000 hrs]  
Tested with VERS-01-SW-\*\*-30-DRY-\*\*

	1.5HE W/FT		3.0HE W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	197	98	374	98	681	98	995	98
PR	190	98	360	98	669	98	968	98
DF	172	98	326	98	616	98	874	98


**RGB** [Calculated L70 (6k) = 55000 hrs]  
Tested with VERS-01-RGB-6.0-RGB-DRY-\*\*

	Red		Green		Blue	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
FR	87	632	175	523	47	471
PR	85	632	172	524	45	470
DF	77	632	154	523	42	469

**RGBW** [Calculated L70 (6k) = 30000 hrs]  
Tested with VERS-01-RGBW-6.0-\*\*-DRY-\*\*


	2700K		3000K		Red		Green		Blue	
	LM/FT	CRI	LM/FT	CRI	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
FR	83	93	143	92	39	631	112	514	33	462
PR	80	93	139	92	38	632	108	515	31	464
DF	71	93	128	92	35	631	100	515	29	464

### LENS with LED visibility




### INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




ORDER EXAMPLE



### CONNECTOR/WIRE IN/WIRE OUT




### MOUNTING

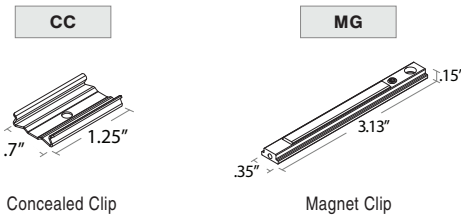

2 pieces of hardware provided for 4' or less;  
4 pieces of hardware provided for greater than 4'


One MG clip provided per foot

### FINISH




### FIXTURE DIMENSION DETAILS

#### DIMENSIONS



#### END CAPS

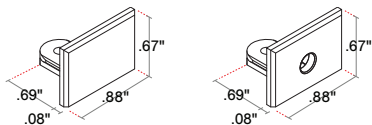

**LED LENGTH (IN)** : Add to nominal LED length for fixture length



$$\begin{aligned} \text{S1 } & .08" + .08" + .25" = .41" \\ \text{P1 } & .08" + .08" + 2(.25") = .66" \end{aligned}$$