

VERS-FLUSH (02) FIXTURES - LINEAR



VERS Flush utilizes a coextruded acrylic lens with an internal reflector that delivers more light while securing the LED in place. Variations in lumen output can be achieved through the use of either polar or diffused lenses. The sleek flat lens sits flush in the fixture allowing the fixture's delivered light performance to truly shine in any indoor setting.

Static White



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
VERS-02-SW			DRY									
Voltage: 24VDC			DRY IP20	PR DF	Single (Closed exit)	1BW CON6 CON24	CLS	WH BK	CL2 CL2P	CC MG	ST BK BZ	
	1.5 3.0 4.0 5.0 6.0 7.5	20 22 24 27 30 35 40			Pass through	1BW CON6 CON24	1BW CON6 CON24	WH BK	CL2 CL2P			

*Available in 1" (or 2") increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

High Efficacy



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
VERS-02-SW			DRY									
Voltage: 24VDC			DRY IP20	PR DF	Single (Closed exit)	1BW CON6 CON24	CLS	WH BK	CL2 CL2P	CC MG	ST BK BZ	
	6.0HE 9.0HE	27 30 35 40			Pass through	1BW CON6 CON24	1BW CON6 CON24	WH BK	CL2 CL2P			


*Available in 2" increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

Dynamic White

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
VERS-02-DW			DRY									
Voltage: 24VDC			DRY IP20	PR DF	Single (Closed exit)	1BW CON6 CON24	CLS	WH BK	CL2 CL2P	CC MG	ST BK BZ	
	6.0 6.0	20/27 20/30			Pass through	1BW CON6 CON24	1BW CON6 CON24	WH BK	CL2 CL2P			

*Available in 2" increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

- NOTES:**
- Field modifications void warranty
 - Data subject to change, all data has +/- 5% tolerance
 - Contact Q-Tran for compatible power supplies
 - 1** BW comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
 - Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
 - 2** Specify CL2P for plenum rated wire
 - 3** Based on SW/ft



VERS-FLUSH (02) FIXTURES - LINEAR



TECHNICAL INFORMATION [CALCULATED L70 (6K) = 70000 HRS]

STATIC WHITE

Tested with VERS-02-SW-**-30-DRY-**

	1.5W/FT		3.0W/FT		4.0W/FT		5.0W/FT		6.0W/FT		7.5W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	156	98	277	98	347	98	411	98	510	98	545	98
DF	144	97	250	98	317	98	384	98	469	98	497	98

DYNAMIC WHITE

Tested with VERS-02-DW-6.0-**-DRY-**


	2000K		2700K		3000K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	214	94	234	97	251	98
DF	198	94	211	97	229	98

HIGH EFFICACY

Tested with VERS-02-SW-**-30-DRY-**


	6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI
PR	686	98	1028	98
DF	630	98	943	98

LENS with LED visibility





INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




CONNECTOR/WIRE IN/WIRE OUT



MOUNTING NOTE: 2 pieces of hardware provided for 4' or less;
4 pieces of hardware provided for greater than 4'

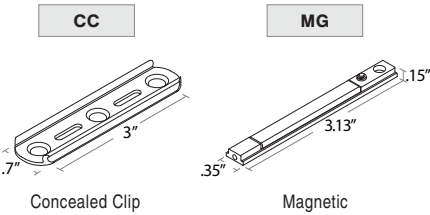


FINISH




FIXTURE DIMENSION DETAILS


DIMENSIONS



END CAPS



LED LENGTH (IN) : Add to nominal LED length for fixture length

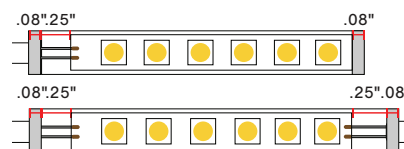

$$\begin{aligned} &\text{Endcap\#1} \\ &\text{Endcap\#2} \\ &\text{Space to solder wire} \\ \text{S1 } &.08'' + .08'' + .25'' = .41'' \\ \text{P1 } &.08'' + .08'' + 2(.25'') = .66'' \end{aligned}$$