

# VERS-FLUSH (02)

## FIXTURES - LINEAR



VERS Flush utilizes a coextruded acrylic lens with an internal reflector that delivers more light while securing the LED in place. Variations in lumen output can be achieved through the use of either polar or diffused lenses. The sleek flat lens sits flush in the fixture allowing the fixture's delivered light performance to truly shine in any indoor setting.

### Static White



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-02-SW</b>			<b>DRY</b>									
Voltage: 24VDC			<b>DRY</b> IP20	<b>PR</b> <b>DF</b>	Single (Closed exit)	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>CLS</b>	<b>WH</b> <b>BK</b>	<b>CL2</b> <b>CL2P</b>	<b>CC</b> <b>MG</b>	<b>ST</b> <b>BK</b> <b>BZ</b> <b>WH</b>	
	<b>1.5</b> <b>3.0</b> <b>4.0</b> <b>5.0</b> <b>6.0</b> <b>7.5</b>	<b>20</b> <b>22</b> <b>24</b> <b>27</b> <b>30</b> <b>35</b> <b>40</b>			Pass through	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>WH</b> <b>BK</b>	<b>CL2</b> <b>CL2P</b>			

\*Available in 1" increments for 1.5W/ft - 5.0W/ft and 2" increments for 6.0W/ft - 7.5W/ft. Maximum length of 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

### High Efficacy



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-02-SW</b>			<b>DRY</b>									
Voltage: 24VDC			<b>DRY</b> IP20	<b>PR</b> <b>DF</b>	Single (Closed exit)	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>CLS</b>	<b>WH</b> <b>BK</b>	<b>CL2</b> <b>CL2P</b>	<b>CC</b> <b>MG</b>	<b>ST</b> <b>BK</b> <b>BZ</b> <b>WH</b>	
	<b>1.5HE</b> <b>3.0HE</b> <b>6.0HE</b> <b>9.0HE</b>	<b>20</b> <b>22</b> <b>24</b> <b>27</b> <b>30</b> <b>35</b> <b>40</b>			Pass through	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>WH</b> <b>BK</b>	<b>CL2</b> <b>CL2P</b>			



\*Available in 2" increments to 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

### Dynamic White

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-02-DW</b>			<b>DRY</b>									
Voltage: 24VDC			<b>DRY</b> IP20	<b>PR</b> <b>DF</b>	Single (Closed exit)	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>CLS</b>	<b>WH</b> <b>BK</b>	<b>CL2</b> <b>CL2P</b>	<b>CC</b> <b>MG</b>	<b>ST</b> <b>BK</b> <b>BZ</b> <b>WH</b>	
	<b>6.0</b>	<b>20/27</b> <b>20/30</b>			Pass through	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>1BW</b> <b>CON6</b> <b>CON24</b>	<b>WH</b> <b>BK</b>	<b>CL2</b> <b>CL2P</b>			

\*Available in 2" increments to 96", plus end caps. See fixture detail on page 3. Minimum fixture length 6".

- NOTES:**
- Field modifications void warranty
  - Data subject to change, all data has +/- 5% tolerance
  - Contact Q-Tran for compatible power supplies
  - NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, at Q-Tran facility (Not applicable for encapsulation)
  - 1**-BW comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
  - Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
  - 2** Specify CL2P for plenum rated wire
  - 3** Based on 5W/ft



# VERS-FLUSH (02) FIXTURES - LINEAR



VERS Flush utilizes a coextruded acrylic lens with an internal reflector that delivers more light while securing the LED in place. Variations in lumen output can be achieved through the use of either polar or diffused lenses. The sleek flat lens sits flush in the fixture allowing the fixture's delivered light performance to truly shine in any indoor setting.

## Static Color

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-02-SC</b> Voltage: 24VDC	5.0		DRY									
	5.0	GR BL RD AB	DRY IP20	PR DF	Single (Closed exit) S1 S2	<sup>1</sup> BW CON6 CON24	CLS	WH BK	CL2 <sup>2</sup> CL2P	CC MG	ST BK BZ WH	
					Pass through P1 P2	<sup>1</sup> BW CON6 CON24	<sup>1</sup> BW CON6 CON24	WH BK	CL2 <sup>2</sup> CL2P			

\*Available in 2" increments to 96", plus end caps.  
See fixture detail on page 3. Minimum fixture length 6".

## RGB


PRODUCT	W/FT	CCT	RATED	LENS	INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
<b>VERS-02-RGB</b> Voltage: 24VDC	6.0	RGB	DRY									
	6.0	RGB	DRY IP20	PR DF	Single (Closed exit) S1 S2	<sup>1</sup> BW CON6 CON24	CLS	WH BK	CL2 <sup>2</sup> CL2P	CC MG	ST BK BZ WH	
					Pass through P1 P2	<sup>1</sup> BW CON6 CON24	<sup>1</sup> BW CON6 CON24	WH BK	CL2 <sup>2</sup> CL2P			

\*Available in 2" increments to 96", plus end caps.  
See fixture detail on page 3. Minimum fixture length 6".

**NOTES:**

- Field modifications void warranty
- Data subject to change, all data has +/- 5% tolerance
- Contact Q-Tran for compatible power supplies

- <sup>1</sup>BW comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
- <sup>2</sup> Specify CL2P for plenum rated wire



# VERS-FLUSH (02)

## FIXTURES - LINEAR



### TECHNICAL INFORMATION

**STATIC WHITE** [Calculated L70 (6k) = 70000 hrs]  
Tested with VERS-02-SW-\*\*-30-DRY-\*\*

	1.5W/FT		3.0W/FT		4.0W/FT		5.0W/FT		6.0W/FT		7.5W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	157	98	274	98	347	98	420	98	496	98	553	98
DF	148	98	256	98	325	98	392	98	477	98	510	98

**STATIC COLOR** [Calculated L70 (6k) = 30000 hrs]  
Tested with VERS-02-SC-5.0-\*\*-DRY-\*\*

	Red		Green		Blue		Amber	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
PR	120	634	561	519	127	467	88	595
DF	114	634	530	519	119	467	83	595

**DYNAMIC WHITE**  
[Calculated L70 (6k) = 70000 hrs]  
Tested with VERS-02-DW-6.0-\*\*-DRY-\*\*

	2000K		2700K		3000K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	217	94	236	97	251	98
DF	204	93	221	97	236	98


**HIGH EFFICACY** [Calculated L70 (6k) = 70000 hrs]  
Tested with VERS-02-SW-\*\*-30-DRY-\*\*

	1.5HE W/FT		3.0HE W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	198	98	379	98	686	98	1022	98
DF	188	98	355	98	666	98	959	98

**RGB** [Calculated L70 (6k) = 55000 hrs]  
Tested with VERS-02-RGB-6.0-RGB-DRY-\*\*


	Red		Green		Blue	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
PR	90	632	179	521	48	470
DF	85	632	168	522	45	470

### LENS with LED visibility





### INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)



### CONNECTOR/WIRE IN/WIRE OUT




### MOUNTING

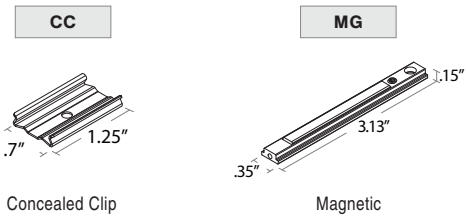

2 pieces of hardware provided for 4' or less;  
4 pieces of hardware provided for greater than 4'


One MG clip provided per foot

### FINISH




### FIXTURE DIMENSION DETAILS

#### DIMENSIONS



#### END CAPS



**LED LENGTH (IN)** : Add to nominal LED length for fixture length

