

VERS-CLEAR (03) FIXTURES - LINEAR



VERS Clear delivers the maximum amount of light with a clear lens that sits flush to the fixture housing. The thin profile of the lens allows for maximum variations of LED sources and the most delivered lumens in the VERS family. Versatility in application abounds, allowing for installation in dry, damp, and wet settings.

Static White



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
VERS-03-SW				CL								
Voltage: 24VDC				CL								
	1.5 3.0 4.0 5.0 6.0 7.5	20 22 24 27 30 35 40	DRY IP20		Single (Closed exit) S1 S2	¹ BW CON6 CON24	CLS	WH BK	CL2 ² CL2P	CC MG	ST BK BZ	
	1.5 3.0 4.0 5.0	24 27 30 35 40	DMP IP54		Pass through P1 P2	¹ BW CON6 CON24	¹ BW CON6 CON24	WH BK	CL2 ² CL2P			
	1.5 3.0 4.0 5.0	20 22 24 27 30 35 40	WET IP67									

*Available in 1" (or 2") increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

High Efficacy



PRODUCT	W/FT	CCT	RATED	LENS	INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
VERS-03-SW			DRY	CL								
Voltage: 24VDC			DRY	CL								
	6.0HE 9.0HE	27 30 35 40	DRY IP20		Single (Closed exit) S1 S2	¹ BW CON6 CON24	CLS	WH BK	CL2 ² CL2P	CC MG	ST BK BZ	
					Pass through P1 P2	¹ BW CON6 CON24	¹ BW CON6 CON24	WH BK	CL2 ² CL2P			


*Available in 2" increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

Dynamic White

PRODUCT	W/FT	CCT	RATED	LENS	INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH* (IN)
VERS-03-DW	6.0			CL								
Voltage: 24VDC				CL								
		20/27 20/30	DRY IP20		Single (Closed exit) S1 S2	¹ BW CON6 CON24	CLS	WH BK	CL2 ² CL2P	CC MG	ST BK BZ	
	6.0	24/30	DMP IP54		Pass through P1 P2	¹ BW CON6 CON24	¹ BW CON6 CON24	WH BK	CL2 ² CL2P			
		20/27 20/30	WET IP67									

*Available in 2" increments to 96", plus end caps. See fixture detail on page 2. Minimum fixture length 6".

- NOTES:**
- Field modifications void warranty
 - Data subject to change, all data has +/- 5% tolerance
 - Contact Q-Tran for compatible power supplies
 - ¹ BW comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
 - Connector/Wire In or Out not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
 - ² Specify CL2P for plenum rated wire
 - ³ Based on SW/ft



VERS-CLEAR (03) FIXTURES - LINEAR



TECHNICAL INFORMATION [CALCULATED L70 (6K) = 70000 HRS]

STATIC WHITE

Tested with VERS-03-SW-**-30-DRY-**

CL	1.5W/FT		3.0W/FT		4.0W/FT		5.0W/FT		6.0W/FT		7.5W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	149	98	262	98	338	98	399	98	496	98	530	98

DYNAMIC WHITE

Tested with VERS-03-DW-6.0-**-DRY-**


CL	2000K		2700K		3000K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	210	94	225	97	239	98

HIGH EFFICACY


Tested with VERS-03-SW-**-30-DRY-**

CL	6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI
CL	667	98	1003	98

LENS with LED visibility




CUT OFF




INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




ORDER EXAMPLE




CONNECTOR/WIRE IN/WIRE OUT



MOUNTING NOTE: 2 pieces of hardware provided for 4' or less;
4 pieces of hardware provided for greater than 4'

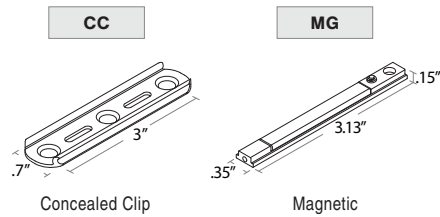


FINISH




FIXTURE DIMENSION DETAILS


DIMENSIONS



END CAPS

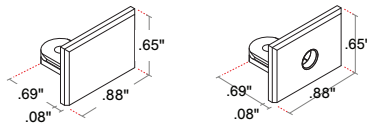

LED LENGTH (IN) : Add to nominal LED length for fixture length

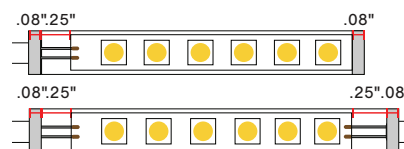

$$\begin{aligned}
 &\text{Endcap\#1} \\
 &\text{Endcap\#2} \\
 &\text{Space to solder wire} \\
 \text{S1 } & .08" + .08" + .25" = .41" \\
 \text{P1 } & .08" + .08" + 2(.25") = .66"
 \end{aligned}$$