





Q-Hex is a module low voltage power supply, available in both 12VAC and 24VAC outputs. Power ratings available are 60W-300W. The Q-Hex comes standard with two primary taps and five secondary taps, to compensate for any voltage drop. The Q-Hex works seamlessly with the Q-TRIX-B160 direct burial junction box, providing an unrivaled solution for all outdoor lighting needs.

HOUSING DIMENSIONS

- Enclosure: 6.20"L x 4.90"W x 6.70"H
- Built-in support

FEATURES

- All leads are live after primary is connected
- Plastic tubes hold leads securely and provide easy access
- Easy to connect and pull wire through protective tube
- All connections should be made with silicone filled wire nuts
- Q-HEX comes with (1) secondary breaker
- Power Supply has thermal protection
- Standards
 - Landscape Lighting
 - : CSA C22.2 No. 250.7-07 Extra-low-voltage Landscape Lighting Systems
 - : UL 1838 Low Voltage Landscape Lighting Systems
 - Low Voltage Lighting
 - : CSA C22.2 No. 250.0-08 Luminaires
 - : UL 2108 Low Voltage Lighting Systems
- CSA Class

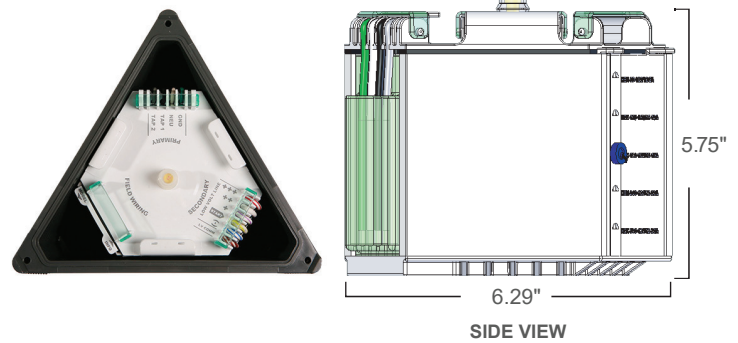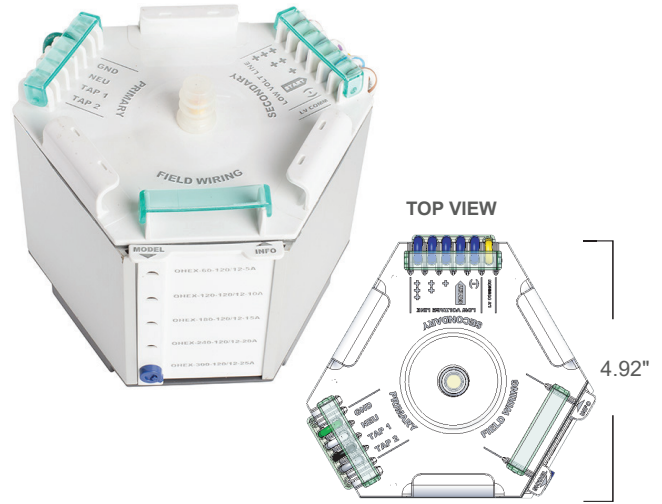

Input	Output (max)	CSA Class	
120VAC	12V 24V	3426-04	Luminaires - Landscape Lighting Systems - Component
		3426-94	Luminaires - Landscape Lighting System - Component - US
120V-277VAC	12V	3426-94	Luminaires - Landscape Lighting Systems - Component - US
120V-277VAC	24V	3426-06	Luminaires - Low Voltage Lighting Systems
		3426-96	Luminaires - Low Voltage Lighting Systems - US

ORDERING GUIDE					
Model	Size	Prim. V	Sec. V	Amps	Opts
Q-HEX	-	-	/	+	-
1 Size	Secondary Voltage(12V/24VAC)		Max Prim. Amps @120V		Max Prim. Amps @277V
60W	12V/24V		0.7 A		0.3 A
120W	12V/24V		1.3 A		0.6 A
180W	12V/24V		1.9 A		0.9 A
240W	12V/24V		2.5 A		1.1 A
300W	12V/24V		3.2 A		1.4 A
2 Primary Voltage	120V		277V		
3 Secondary Voltage	12V		24V		
4. Secondary Breaker Amperage	AMPS	Max 12V Load	Max 24V Load		
2.5A			60W		
5A		60W	120W		
7.5A			180W		
10A		120W	240W		
12.5A			300W		
15A		180W			
20A		240W			
25A		300W			
Ordering Example					
Q-HEX-300-120/12					

PROJECT NAME	DATE	COMPANY	TYPE	NOTE