



BOXA-RGB FIXTURES - FLEXIBLE (Q-CAP)



| PRODUCT | MOUNTING | RATED | CCT | OUTPUT | LENS | TYPE | CONNECTOR/ WIRE IN | CONNECTOR/ WIRE OUT | END CAPS (NO FEED) | LENGTH (IN) |
|---|---|--------------------------|--------------------------|------------------------|--------------------------------|--|--|--|--|-------------------------------|
| BOXA-RGB | | | RGB | SO | ENC/CL | | BW | | | |
| Voltage: 24 VDC Wattage: 1.8 W/ft Per Channel 5.3 W/ft Total Load | WSC RLC MC *SGC PPS-2 PPS-96 PPS-FT PPS-LP-2 PPS-LP-96 PPS-LP-FT | DRY WET | RGB RGB | SO SO | ENC/CL ENC/CL | S1 S2 S3 S4 2S5 P1 P2 P3 P4 2P5 | 1BW 1BW | N/A 1BW | CL WH N/A | 2" increments from 2"-191" |


ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE

- NOTES:**
- Field modifications are not covered under Q-Tran warranty
 - Data subject to change, all data has +/- 5% tolerance
 - PPS-FT** is to be cut at Q-Tran to requested length
 - 1** BW comes in standard 24"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
 - Connector/Wire In or Out not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with white endcap (WH)
 - 2** PPS mounting clip recommended for seamless applications

OUTPUT Tested for BOXA-RGB-WSC-DRY [L70 = 40000 HRS]

| CCT | SO Standard Output | | |
|-------|-----------------------|------------------|--------------------|
| | ENC/CL lm/ft | Wavelength nm | Circuit Wattage |
| Red | 55.6 | 630 | 1.9 |
| Green | 142 | 519 | 2.4 |
| Blue | 25.7 | 469 | 1.2 |
| All | 208 | - | 5.3 |


LENS with LED visibility



CONNECTOR/WIRE IN




CONNECTOR/WIRE OUT



MOUNTING NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.


| | | | |
|-------------------|--------------------|-------------------------------|-------------------------|
| WSC QTY | RLC QTY | MC QTY | SGC QTY |
| | | | |
| White snug clip | Rigid lock channel | Magnetic clip (Cove use only) | Side graze channel |
| PPS-2 QTY | PPS-96 QTY | PPS-LP-2 QTY | PPS-LP-96 QTY |
| | | | |
| PVC mounting clip | PVC channel | Low profile PVC mounting clip | Low profile PVC channel |

DIMENSIONS




TYPE


SINGLE (Input only)

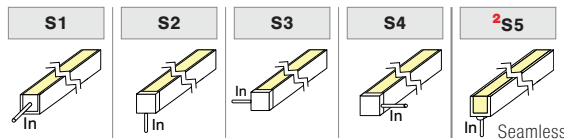


PASS THROUGH (Input/Output)

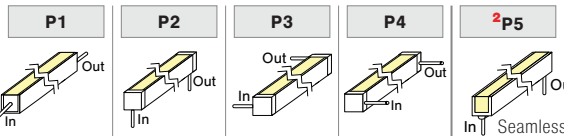


ORDER EXAMPLE




FLEXIBILITY




SEAMLESS



END CAPS (NO FEED)



END CAPS (WITH FEED)



| PROJECT NAME | DATE | COMPANY | TYPE | NOTE |
|--------------|------|---------|------|------|
| | | | | |